
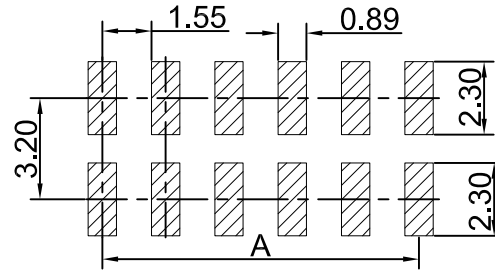


# DRAWING FOR CUSTOMER

- SPEC.:**  
 ●Rated Current:1.5A AC,DC  
 ●Withstand Voltage:500V AC/minute  
 ●Insulation Resistance:1000MΩ min  
 Contact Resistance: 20mΩ Max  
 ●Temperature Range:-40℃~+105℃

- Material:**  
 ●Insulator Material:PA6T UL 94V-0  
 ●Contact Material:Brass  
 ●Finish:Gold-plated,over Nickel  
 ●Max. Processing Temp:240℃ for 30-60seconds  
 (260℃ for 5seconds)

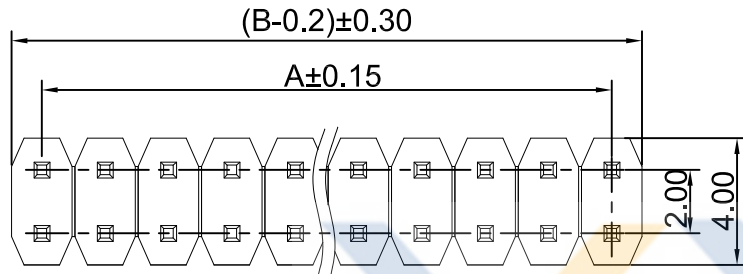

Recommended P.C.Board Hole Layout (Tolerance:±0.05)

KBP20004-D XX X S R 4 A

D: Double row

Pin No.

Version

Mold No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)



P: PE (袋装)

A:TRAY (盒装)

R:Right Angle  
V:Vertical

S:SMT

D:DIP

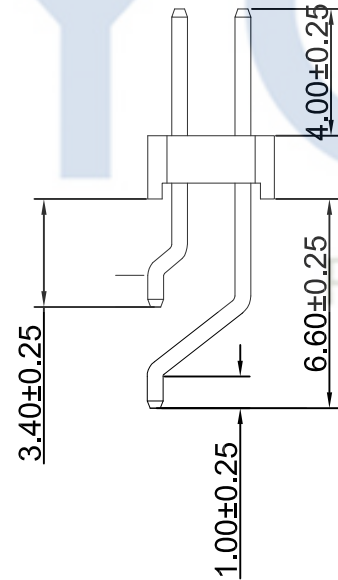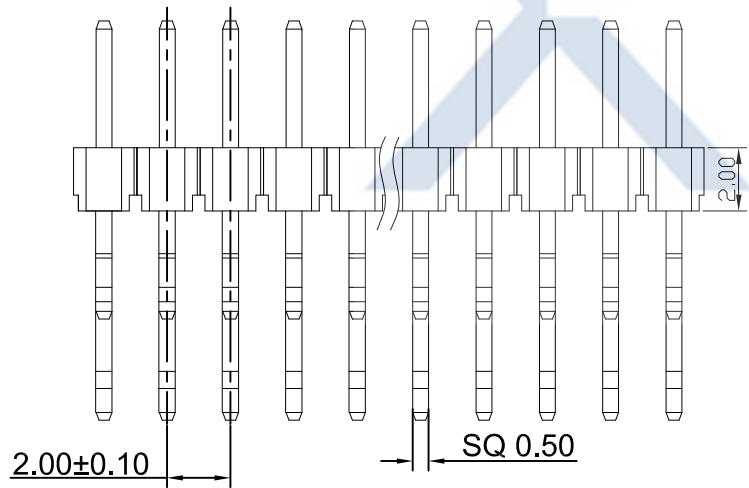

Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B
1	—	2.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
2	2.00	4.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
3	4.00	6.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
4	6.00	8.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
5	8.00	10.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
6	10.00	12.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
7	12.00	14.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
8	14.00	16.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
9	16.00	18.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
10	18.00	20.00	20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

**XYCO** 东莞市轩业电子科技有限公司  
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	APPROVED 核准	DWG NO. 圖號	PE2010017A
2014-05-13	A		KBP20004-DXXXSR4A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	Devin	THOMAS	PE2010017A	

UNIT 單位	mm	PRODUCT NAME 產品名稱	PH:2.00 Dual Row Male SMT 90° PIN HEADER