

DRAWING FOR CUSTOMER

KBP25418- D XX X D R 4 A

Double row

Pin No.

包裝方式:

T:TUBE (管裝)
R:REEL (卷裝)
P: PE (袋裝)
A:TRAY (盒裝)

Version

Mold No.

R:Right Angle
V:Vertical

S:SMT





D:DIP

■SPEC.:

- Rated Current:3.0A AC,DC
- Withstand Voltage:1000V AC/minute
- Insulation Resistance:1000MΩ min
- Contact Resistance: 20mΩ Max
- Temperature Range:-40℃~+105℃

■Material:

- Insulator Material:PBT UL94V-0
- Contact Material:Brass
- Finish:Gold-plated,over Nickel
- Max. Processing Temp:200℃ for 30-60seconds
(220℃ for 5seconds)

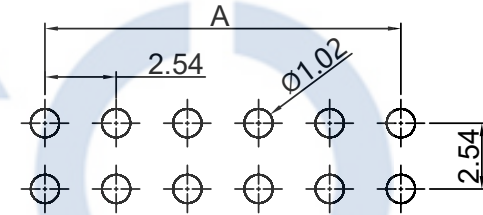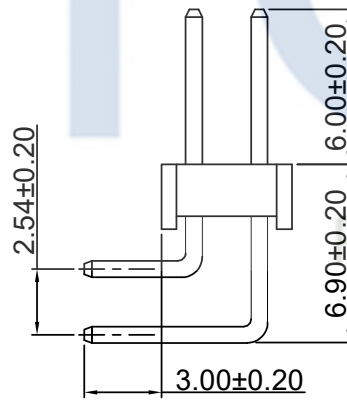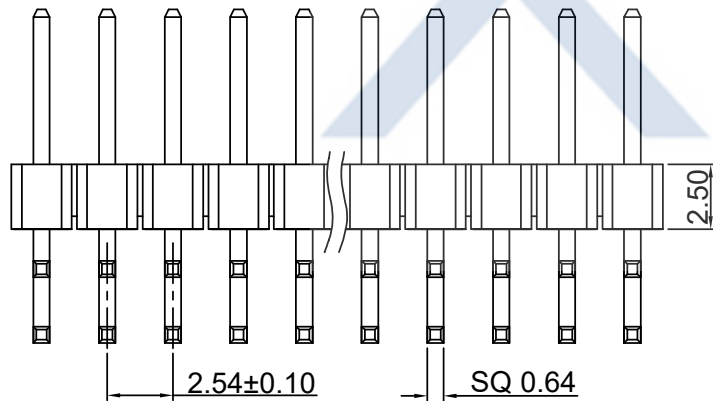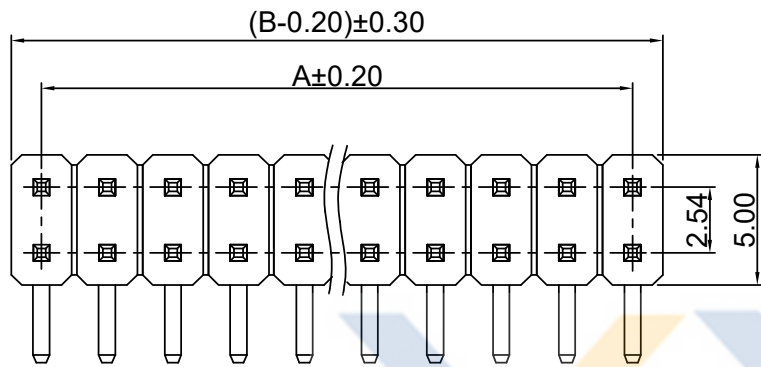


Recommended P.C. Board
Hole Layout
(Tolerance:±0.05)

Poles	A	B	Poles	A	B	Poles	A	B	Poles	A	B
1	—	2.54	11	25.40	27.94	21	50.80	53.34	31	76.20	78.74
2	2.54	5.08	12	27.94	30.48	22	53.34	55.88	32	78.74	81.28
3	5.08	7.62	13	30.48	33.02	23	55.88	58.42	33	81.28	83.82
4	7.62	10.16	14	33.02	35.56	24	58.42	60.96	34	83.82	86.36
5	10.16	12.70	15	35.56	38.10	25	60.96	63.50	35	86.36	88.90
6	12.70	15.24	16	38.10	40.64	26	63.50	66.04	36	88.90	91.44
7	15.24	17.78	17	40.64	43.18	27	66.04	68.58	37	91.44	93.98
8	17.78	20.32	18	43.18	45.72	28	68.58	71.12	38	93.98	96.52
9	20.32	22.86	19	45.72	48.26	29	71.12	73.66	39	96.52	99.06
10	22.86	25.40	20	48.26	50.80	30	73.66	76.20	40	99.06	101.60

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2020-08-11		A			KBP25418-DXXXDR4A	Devin	KBP25418-DXXXDR4A		
DATE	日期	VER	版本	CHANGE HISTORY	變更歷史	CHANGED NAME	修改後料號	DRAWING	變更者
								TOLERANCE	公差
								.X=±0.30	
								.XX=±0.20	
								.XXX=±0.10	
						DRAWING	設計者	Devin	
						CHECKED	審查	Thomas	
						APPROVED	核准	William	
						DWG NO.	圖號	PE211210A	



UNIT
單位

mm

PRODUCT NAME
產品名稱

PH2.54 MALE HEADER SINGLE ROWS DIP TYPE
RIGHT ANGLE BASE PC3.0 PA6.0 PB6.9