

DRAWING FOR CUSTOMER

■SPEC.:




- Rated Voltage:250V AC,DC
- Rated Current:3A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator:PPO UL94V-0
- Color:Black

KB951-D X X H T 2 A

D:Double row
Pin No.
Housing
Version
Mold No.
T:Protruding Point

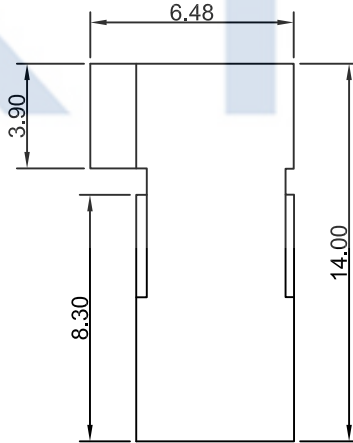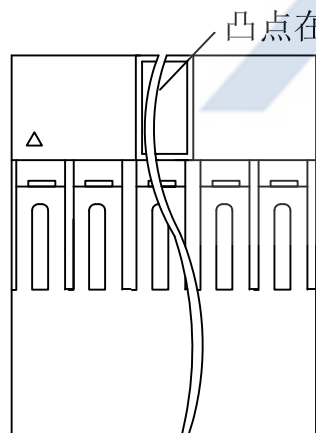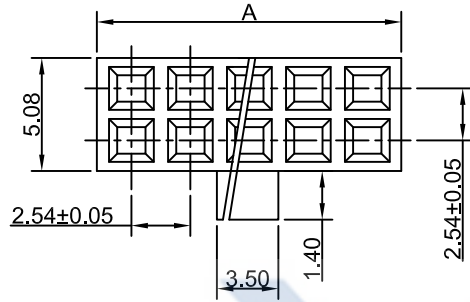

Poles	Dimensions (mm)	Poles	Dimensions (mm)
	A		A
2x02	5.08	2x12	30.48
2x03	7.62	2x13	33.02
2x04	10.16	2x14	35.56
2x05	12.70	2x15	38.10
2x06	15.24	2x16	40.64
2x07	17.78	2x17	43.18
2x08	20.32	2x18	45.72
2x09	22.86	2x19	48.26
2x10	25.40	2x20	50.80
2x11	27.94	2x22	55.88

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB951-DXXHT2A
2015-10-25	A		KB951-DXXHT2A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.05	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號 PE1604003A

UNIT 單位	mm	PRODUCT NAME 產品名稱	DUPONT PH2.54mm Housing 低凸点
------------	----	----------------------	--------------------------------