
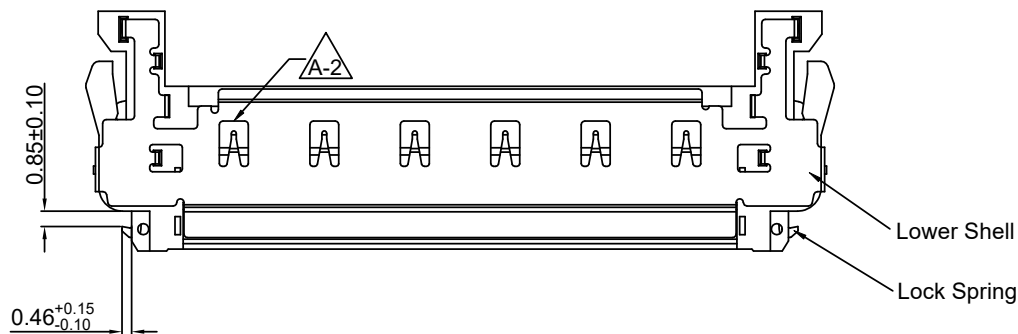
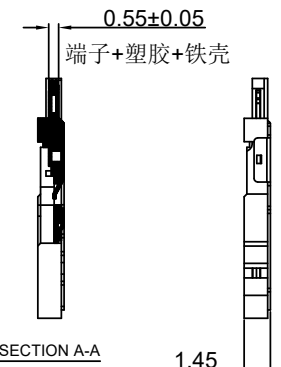
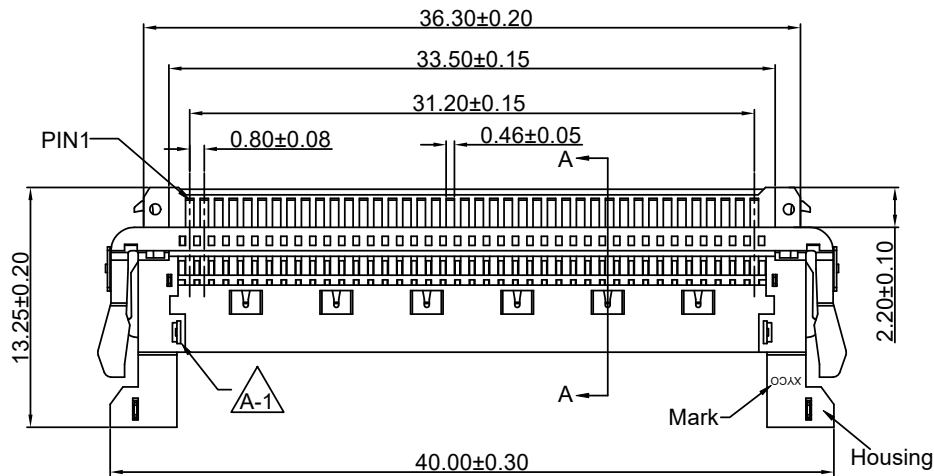


DRAWING FOR CUSTOMER

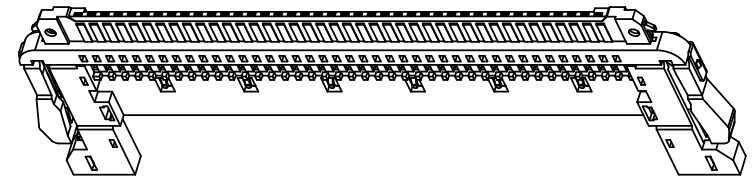


■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:0.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40℃~+80℃

■Material:

- Insulator: LCP UL94V-0 , Color:Black
- Contact Pin:Phoshor Bronze Finish: 3u" (Min)Gold Plated over 50u"(Min) Nicke
- Lower Shell:Phoshor Bronze Finish: 80u" Tin Plated over 50u" (Min) Nickel
- Lock Spring:Stainless steel

KB803-40 H L S 1 A -C2 X

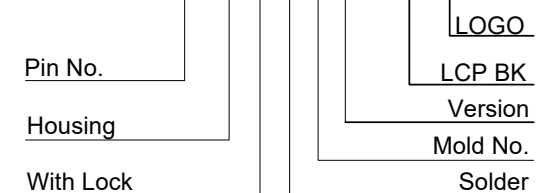

2022-04-14	A-2	产品优化	KB803-40HLS1A-C2X	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB803-40HLS1A-C2X	
2021-05-12	A-1	产品优化	KB803-40HLS1A-C2X	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas		
2018-05-09	A		KB803-40HLS1A-C2X	Devin		APPROVED 核准	William		
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者				DWG NO. 圖號	PE201017A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

UNIT	mm	PRODUCT NAME 產品名稱	FI-NX PH:0.8mm 40P Wire To Board Solder Type Connector
------	----	----------------------	---