




# DRAWING FOR CUSTOMER

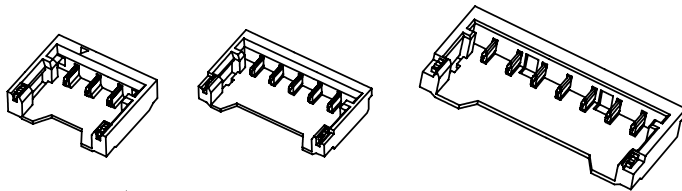


3D View

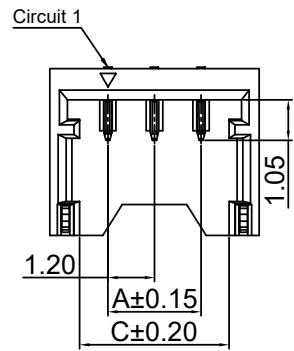


2~3 Pin  
Without Sticking Point

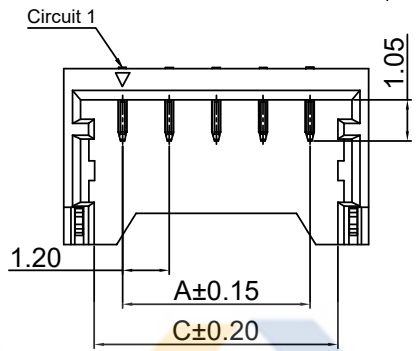


4~5 Pin  
Without Sticking Point

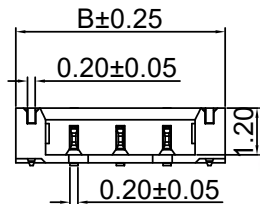


2~3 Pin  
Without Sticking Point

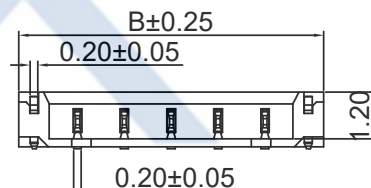


4~5 Pin  
Without Sticking Point

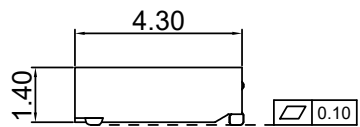

02~03 Pin

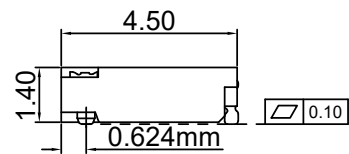


04~10 Pin

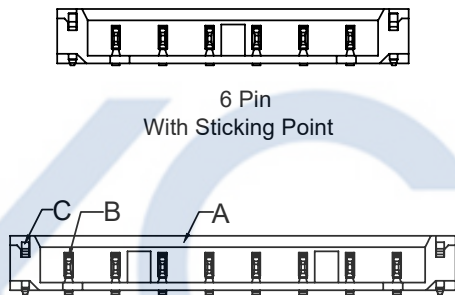

6 Pin  
With Sticking Point

7~10 Pin  
With Sticking Point

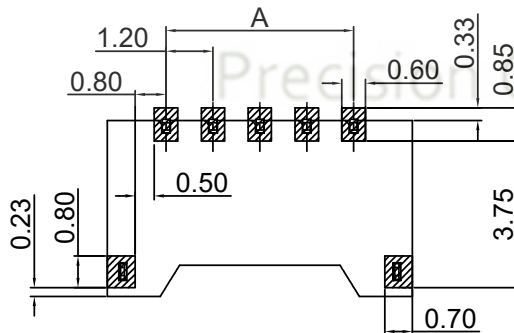


■ Spec:

- Rated Voltage: 50V AC,DCm
- Rated Current: 1.5A AC,DC
- Withstand Voltage: 500V AC/minute
- Contact Resistance: 20mΩ(MAX.)
- Insulation Resistance: 100Ω(MIN.)
- Temperature Range: -25°C~+85°C

■ Material:

- Insulator(A): P7-PA4T UL94V-0;  
Color: BK-Black
- Contact Pin(B): Phosphor Bronze  
Finish: Matted Au-Plated, over Nickel
- Solder Tab(C): Phosphor Bronze  
Finish: Matted Sn-Plated, over Nickel
- Qty: 4KPCS/Reel

KB1201-XX X S R 2 A -P7- BK

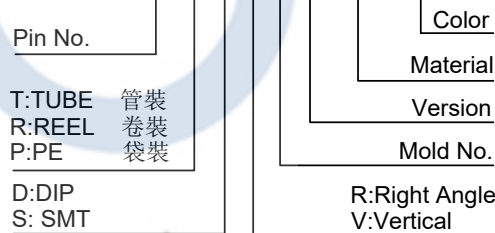

Poles	Dimension(mm)			Poles	Dimension(mm)		
	A	B	C		A	B	C
2P	1.20	4.20	2.64	7P	7.20	10.20	8.64
3P	2.40	5.40	3.84	8P	8.40	11.40	9.84
4P	3.60	6.60	5.04	9P	9.60	12.60	11.40
5P	4.80	7.80	6.24	10P	10.80	13.80	12.24
6P	6.00	9.00	7.44				

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2022-05-11		A	KB1201-XXXSR2A-P7-BK		Devin	TOLERANCE 公差		DRAWING 設計者 Devin		KB1201-XXXSR2A-P7-BK	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		.X=±0.30	CHECKED 審查	Thomas	PART NO. 料號		UNIT 單位
						.XX=±0.20	APPROVED 核准	William	DWG NO. 圖號	PE16011005A	mm
						.XXX=±0.10			PRODUCT NAME 產品名稱		78171 PH1.20mm SMT Right Angle Wafer