


DRAWING FOR CUSTOMER

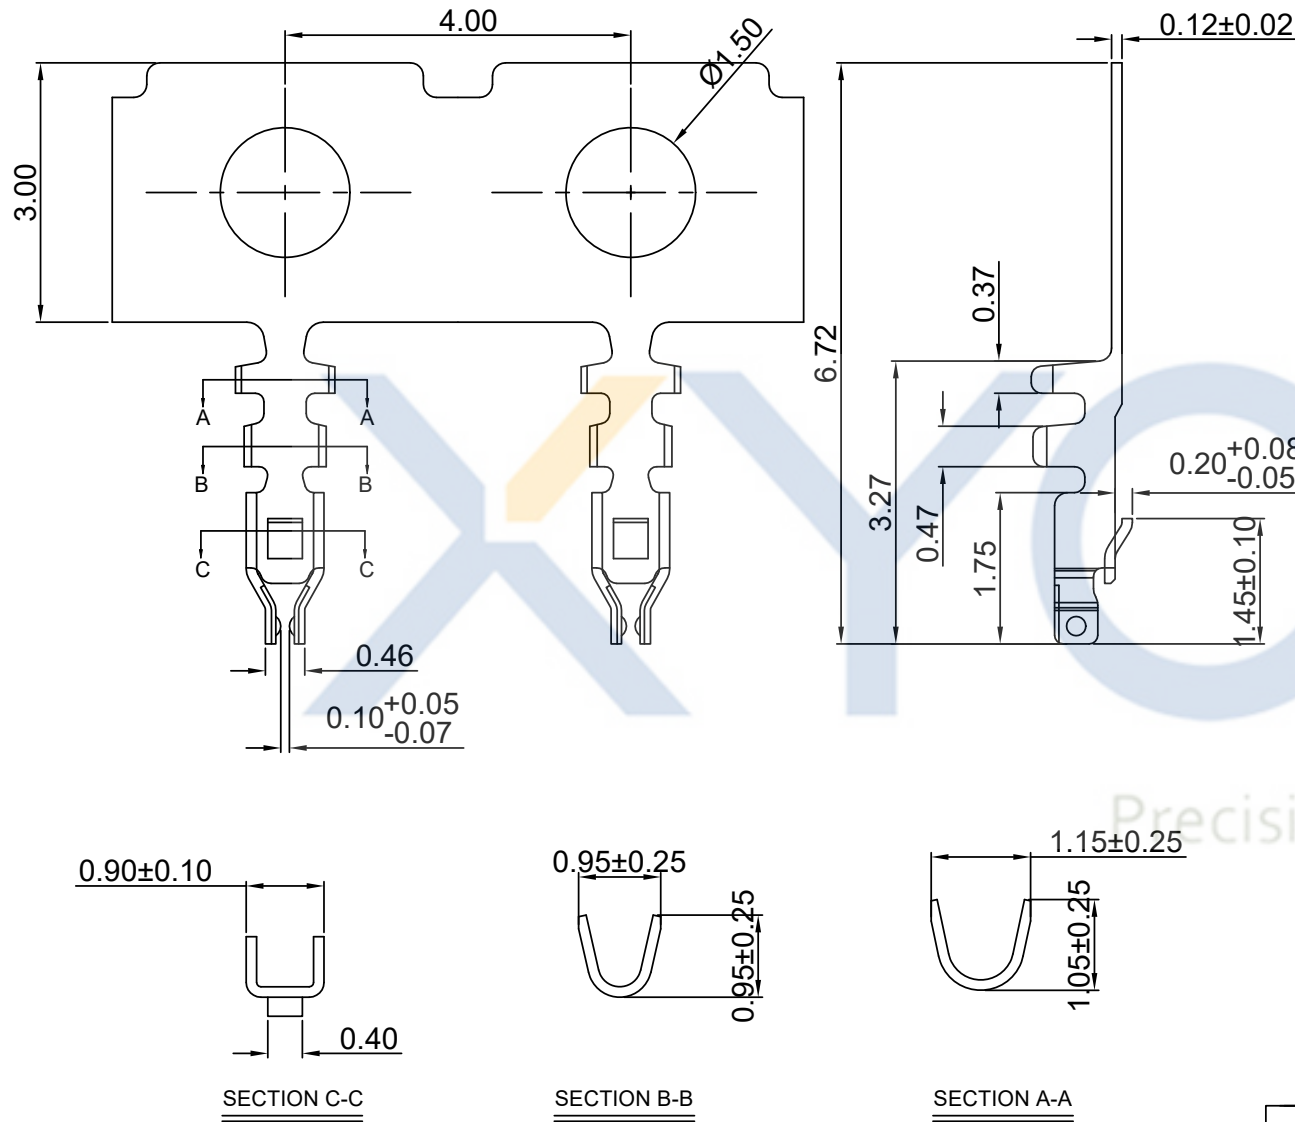

■ SPEC.:

- Rated Voltage: 50V AC, DC
- Rated Current: 1.5A AC, DC
- Withstand Voltage: 500V AC/minute
- Contact Resistance: 20mΩ max
- Insulation Resistance: 100MΩ min
- Temperature Range: -25°C ~ +85°C

■ Terminal:

- Material: Phosphor Bronze
- Finish: Gold-flash over Nickel
- Applicable Wires: AWG#28~32
- QTY.: 15KPCS/Reel

KB1201-XXXT1A

- 1: All plated
- 2: Half plated

Plating

- 0: Tin-plat
- 1: Gold Flash
- 2: Gold Plat3u"
- 3: Gold Plat5u"
- 10: Gold Plat10u"
- 15: Gold Plat15u"

Version

Mold No.

Terminal

SECTION C-C

SECTION B-B

SECTION A-A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2021-08-13		A	KB1201-XXXT1A		Devin	TOLERANCE 公差	DRAWING 设计者	Devin	KB1201-XXXT1A		UNIT 单位		mm		PRODUCT NAME 产品名称		78172 PH1.20mm Wire To Board Terminal	
DATE 日期	VER 版本	CHANGE HISTORY 变更历史		CHANGED NAME 修改后料号	DRAWING 变更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 审查	Thomas	PART NO. 料號	DWG NO. 圖號	PE16011002A							
								APPROVED 核准										
								William										