DRAWING FOR CUSTOMER

■SPEC.:
- ●Rated Voltage:250V AC,DC
- ●Rated Current:3A AC,DC
- ●Withstand Voltage:500V AC/minute
- ●Contact Resistance:20mΩ max
- ●Insulation Resistance:1000MΩ min
- ●Temperature Range:-25℃~+85℃

■Material :
- ●Insulator(A): P3-PA6T UL94V-0
  Color:BGE-Beige
- ●Contact Pin(B):Brass
  Finish:Tin-plated;over Nickel



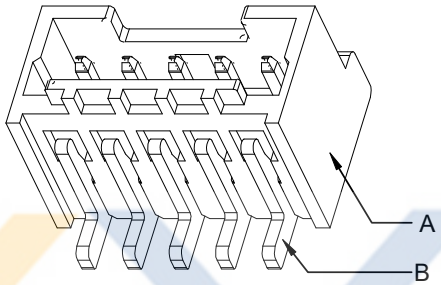

3D View

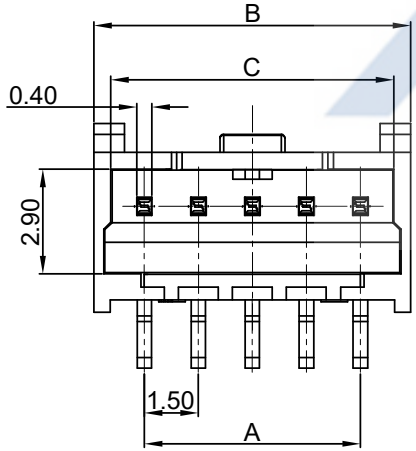

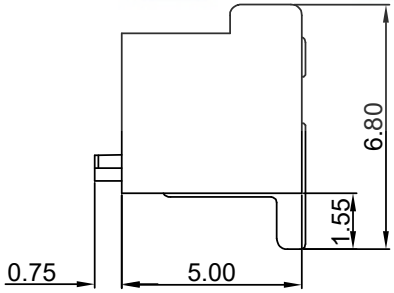



KB920-XX X S L V 5 A -XX-XX

- Pin No.
- T:TUBE 管裝 / R:REEL 卷裝 / P:PE 袋裝
- D:DIP / S: SMT
- Lock
- R:Right Angle / V:Vertical
- Mold No.
- Version
- Material
- Color

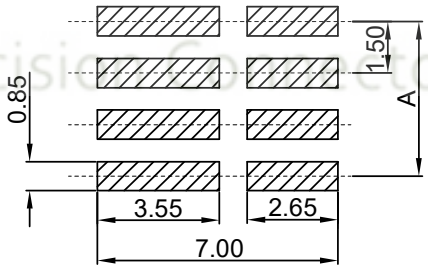

Recommend PCB Layout

Poles	Dimensions(mm)		
	A	B	C
02	1.50	4.30	3.35
03	3.00	5.80	4.85
04	4.50	7.30	6.35
05	6.00	8.80	7.85
06	7.50	10.30	9.35
07	9.00	11.80	10.85
08	10.50	13.30	12.35
09	12.00	14.80	13.85
10	13.50	16.30	15.35
11	15.00	17.80	16.85
12	16.50	19.30	18.35
13	18.00	20.80	19.85
14	19.50	22.30	21.35
15	21.00	23.80	22.85

XYCO Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2015-10-20	A		KB920-XXXSLV5A-XX-XX	Devin

TOLERANCE 公 差	DRAWING 設計者	Devin	KB920-XXXSLV5A-XX-XX
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
	APPROVED 核准	William	DWG NO. 圖號 PE1907002A

UNIT 單位: mm

PRODUCT NAME 產品名稱: 87437 PH1.50mm Wire To Board SMT Vertical Wafer