



DRAWING FOR CUSTOMER

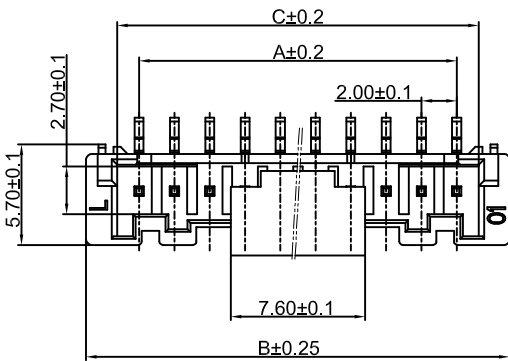

注：十孔及以上双卡扣

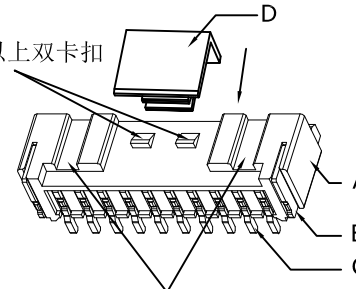

注：六孔及以下无此槽

■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:3A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator(A):P3-PA6T UL94V-0
Color:BGE-Beige
- Contact Pin(B): Brass
Finish:Tin-plated;over Nickel
- Solder Tab(C):Brass
Finish:Tin-plated,over Nickel
- CAP(D):P3-PA6T UL94V-0




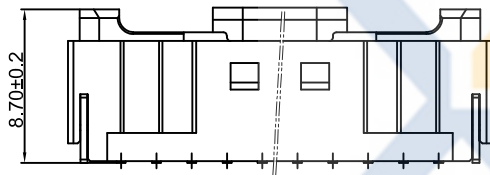


示意图 10~15P

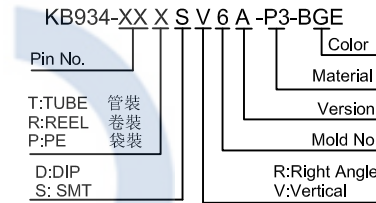



0.10



2P

Poles	Dimensions (mm)		
	A	B	C
02	2.00	8.00	4.55
03	4.00	10.00	6.55
04	6.00	12.00	8.55
05	8.00	14.00	10.55
06	10.00	16.00	12.55
07	12.00	18.00	14.55
08	14.00	20.00	16.55
09	16.00	22.00	18.55
10	18.00	24.00	20.55
11	20.00	26.00	22.55
12	22.00	28.00	24.55
13	24.00	30.00	26.55
14	26.00	32.00	28.55
15	28.00	34.00	30.55

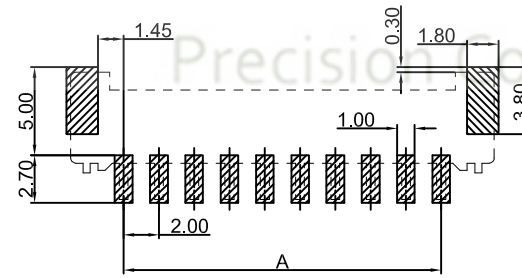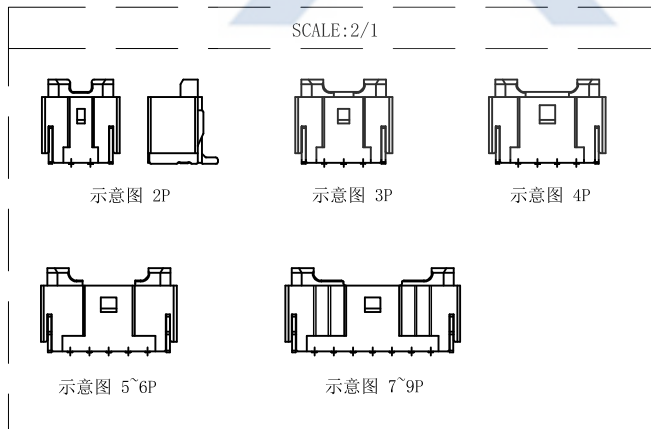

PCB LAYOUT

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-08-12		A			KB934-XXXSV6A-P3-BGE	Devin	KB934-XXXSV6A-P3-BGE		UNIT 單位		mm	PRODUCT NAME 產品名稱	PA2.0mm Wire To Board	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	DEVIN	PART NO. 料號	DWG NO. 圖號	PE1903013A	mm	PRODUCT NAME 產品名稱	SMT Vertical Wafer	
					.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas							
						APPROVED 核准	William							