

DRAWING FOR CUSTOMER





■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:3A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:10mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃



■Material:

- Insulator:PA66 UL94V-0
- Color:White


KB934-XXHL6A

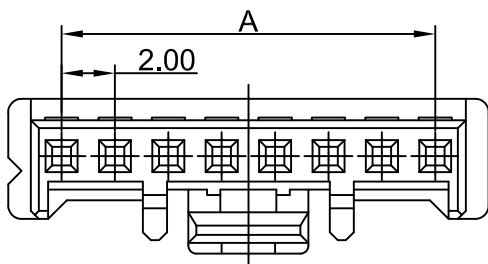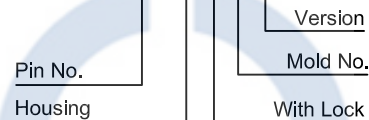


2PIN

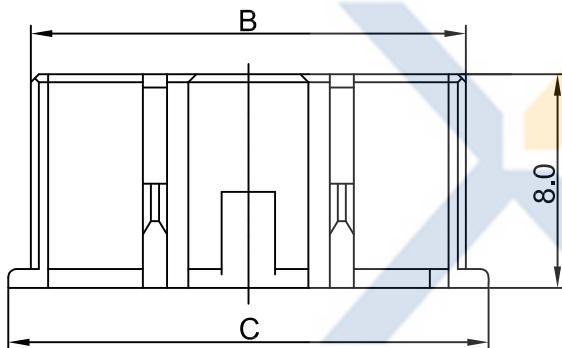


3PIN

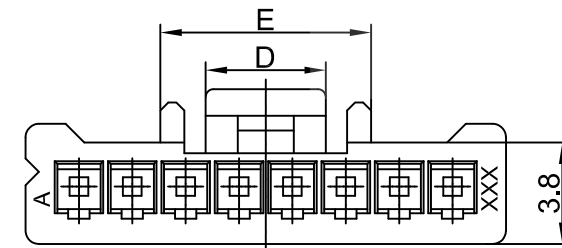


5~15PIN



4PIN



3PIN



2PIN

Poles	Dimensions(mm)				
	A	B	C	D	E
02	2.0	4.3	6.0	2.6	
03	4.0	6.3	8.0	3.8	6.4
04	6.0	8.3	10.0	4.5	8.4
05	8.0	10.3	12.0	4.5	7.9
06	10.0	12.3	14.0	4.5	7.9
07	12.0	14.3	16.0	4.5	7.9
08	14.0	16.3	18.0	4.5	7.9
09	16.0	18.3	20.0	4.5	7.9
10	18.0	20.3	22.0	11.0	14.5
11	20.0	22.3	24.0	11.0	14.5
12	22.0	24.3	26.0	11.0	14.5
13	24.0	26.3	28.0	11.0	14.5
14	26.0	28.3	30.0	11.0	14.5
15	28.0	30.3	32.0	11.0	14.5

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-03-20		A	KB934-XXHL6A		Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB934-XXHL6A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
							APPROVED 核准	William	DWG NO. 圖號	mm
1	2	3	4	5	6	7	8	9	PE211001A	PRODUCT NAME 產品名稱

PA PH2.00mm Wire To Board	
Housing With Lock	