


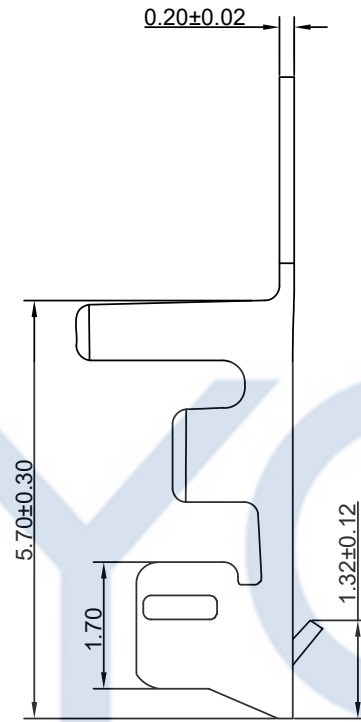



DRAWING FOR CUSTOMER

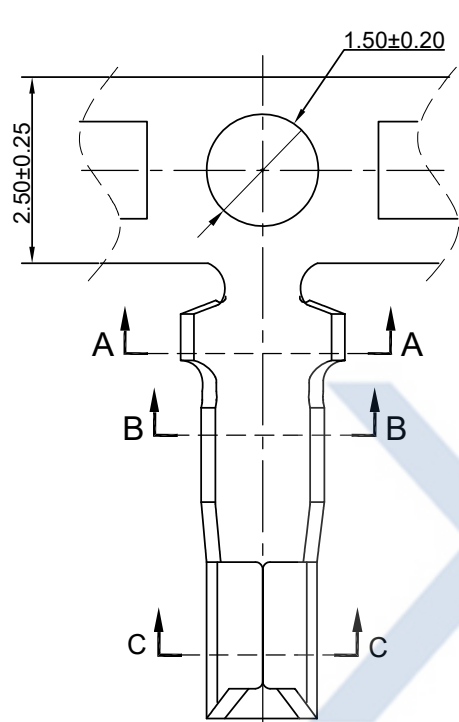

Section C-C



Section B-B



Section A-A

- SPEC.:
- Rated Voltage:100V AC,DC
 - Rated Current:2A AC,DC
 - Withstand Voltage:800V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25℃~+85℃

- Terminal:
- Material:Phosphor Bronze C5191
 - Finish:Tin-plated ;over Nickel
 - Applicable Wire: AWG#24~28
 - QTY.:10KPCS/Reel

KB933-XX T 4 A

- 1:All plated
- 2:Half plated

Plating

- 0: Tin-plat
- 1: Gold Flash
- 2: Gold Plat3u"
- 3: Gold Plat5u"

Version

Mold No.

Terminal

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

				TOLERANCE 公差		DRAWING 設計者		Devin		KB933-XXT4A					
2015-11-30		A		.X=±0.30 .XX=±0.20 .XXX=±0.10		CHECKED 審查		Thomas		PART NO. 料號		UNIT 單位		mm	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史		CHANGED NAME 修改後料號		DRAWING 變更者		APPROVED 核准		William		DWG NO. 圖號		PE1705008A	
												PRODUCT NAME 產品名稱		PHR PH2.0mm Wire To Board Termianl	