



DRAWING FOR CUSTOMER

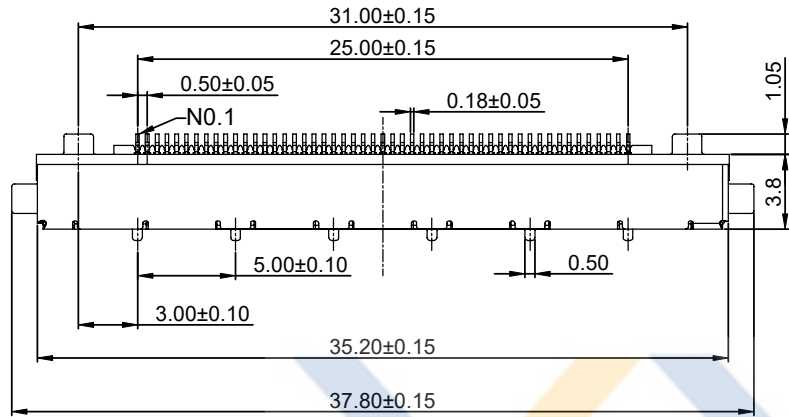



- SPEC.:
- Rated Voltage:200V AC,DC
 - Rated Current:0.8A AC,DC
 - Withstand Voltage:500V AC/minute
 - Contact Resistance:40mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-40℃~+80℃

- Material:
- Insulator: LCP HF UL 94V-0,Black
 - Contact Pin:Copper Alloy
Finish:Contact Area Gold-Plated,Other Area Tin-Plated over Nickel
 - Shell:Stainless steel
Finish:Matte Tin-Plated,over Nickel
- Q'TY: 1250PCS/Reel

KB904-51 X S R 3 A

Pin No.	Version
	Mold No.
T: TUBE (管装)	R:Right Angle
R: REEL (卷装)	V:Vertical
P: P E (袋装)	S:SMT
	D:DIP

Precision Connectors

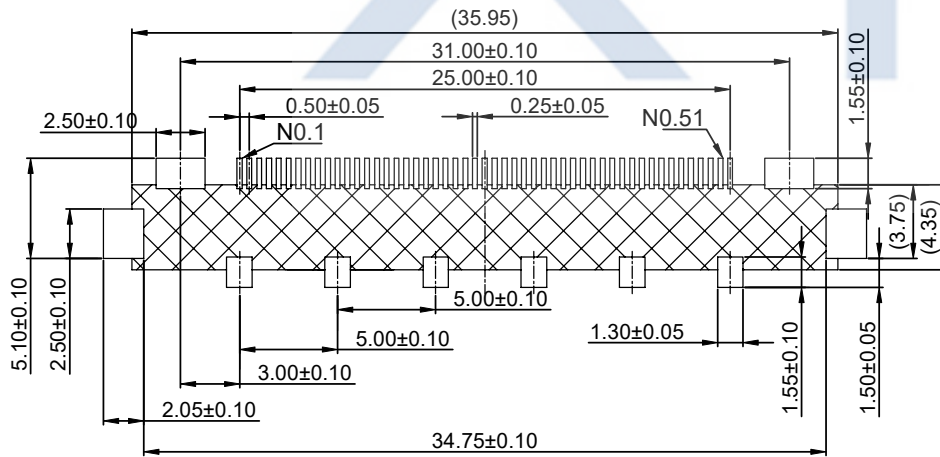

RECOMMENDED P.C.B LAYOUT

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2024-03-20	A-1	旧模老化, 开设新模, 产品优化	KB904-51XSR3A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB904-51XSR3A		UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-RE PH0.5 Wire to board Right Angle SMT Wafer
2016-12-15	A		KB904-51XSR3A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號					
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE2403002A				