

DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:5A AC,DC
 - Withstand Voltage:1000V AC/minute
 - Contact Resistance:10mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-25°C~+85°C





- Material:
- Insulator:PA66 UL94V-2
 - Color:WH-White,BK-Black

KB9302-D X X H L 6 A -XX

Double row Color Version

Pin No. Mold No.

Housing With Lock

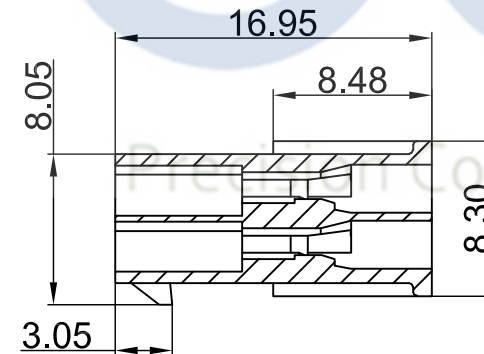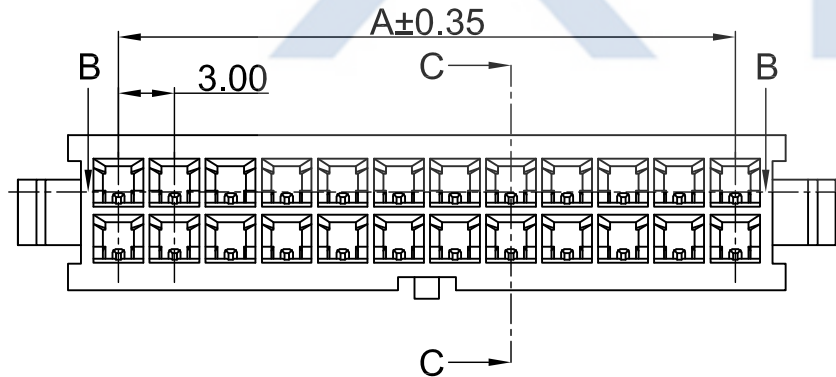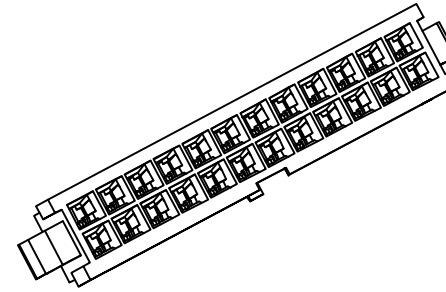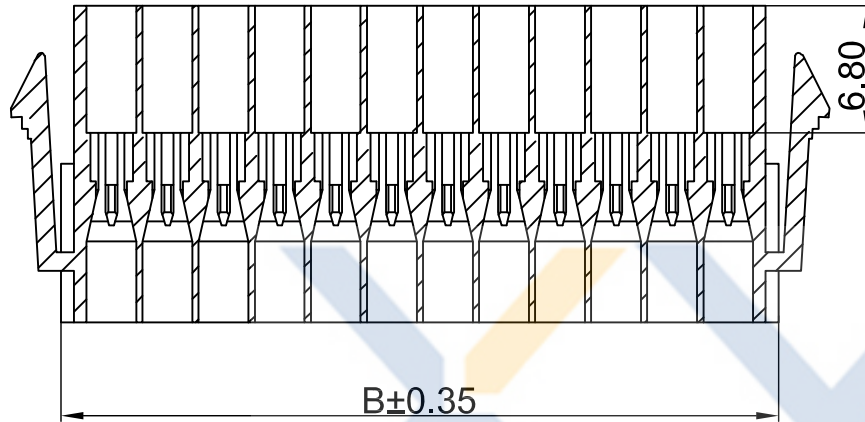

Section:A-A

Poles	Dimensions(mm)	
	A	B
2X01	---	5.40
2X02	3.00	8.40
2X03	6.00	11.40
2X04	9.00	14.40
2X05	12.00	17.40
2X06	15.00	20.40
2X07	18.00	23.40
2X08	21.00	26.40
2X09	24.00	29.40
2X10	27.00	32.40
2X11	30.00	35.40
2X12	33.00	38.40

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-10-16		A	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE 公差	DRAWING 設計者	Devin	KB9302-DXXHL6A-XX	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
							APPROVED 核准	William	DWG NO. 圖號	PE211207A

UNIT 單位	mm	PRODUCT NAME 產品名稱	43020 PH3.0mm Wire To Wire Dual Row Housing with lock-Female
------------	----	----------------------	---