

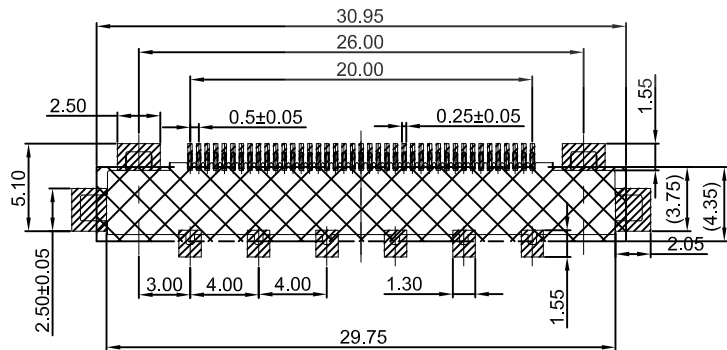
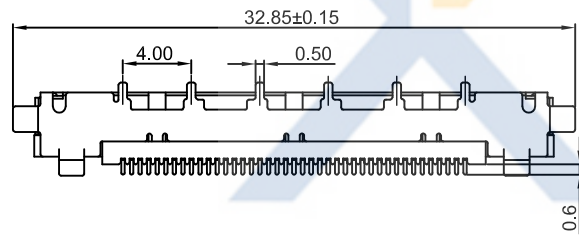



DRAWING FOR CUSTOMER

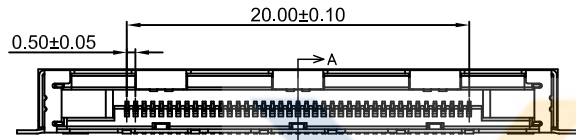

APPLICABLE P.C.B DIMENSION

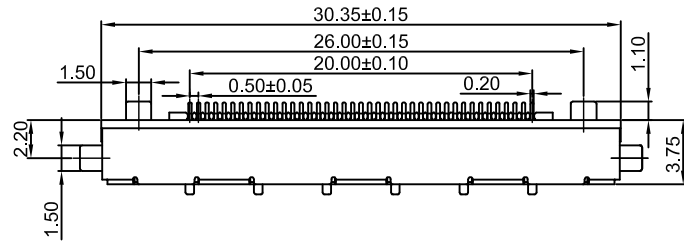

SECTION A-A
SCALE 2:1

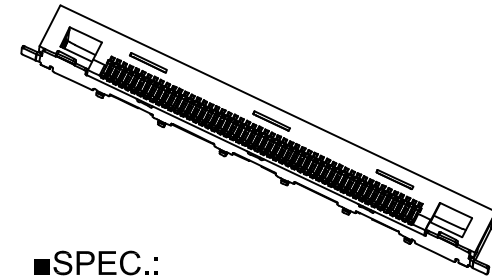

■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:0.8A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40℃~+80℃

■Material:

- Insulator: LCP HF UL 94V-0,Black
- Contact Pin:Copper Alloy
Finish:Gold-Plated,over Nickel
- Shell:Stainless steel
Finish:Matte Tin-Plated,over Nickel
- Q'TY: 1000PCS/Reel

KB904-41 X S R 3 A

Pin No.
T:TUBE (管装)
R:REEL (卷装)
P:P E (袋装)

Version
Mold No.
R:Right Angle
V:Vertical
S:SMT
D:DIP

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-12-15	A		KB904-41XSR3A	Devin	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者 Devin	KB904-41XSR3A
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		CHECKED 審查 Thomas	PART NO. 料號
						APPROVED 核准 William	DWG NO. 圖號 PE1704005A

UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-RE PH0.5 Wire to board Right Angle SMT Wafer
------------	----	----------------------	--