DRAWING FOR CUSTOMER

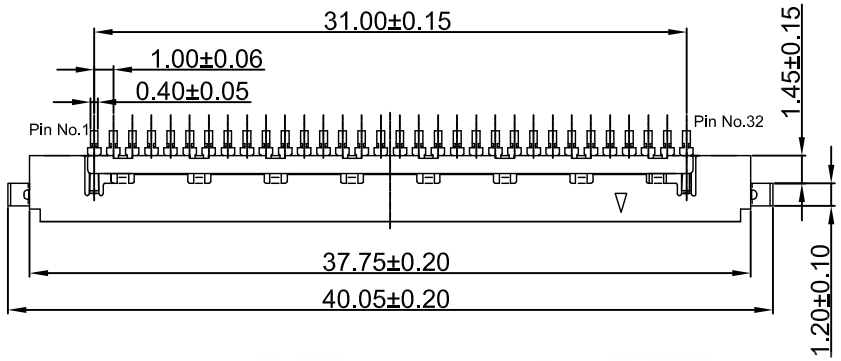



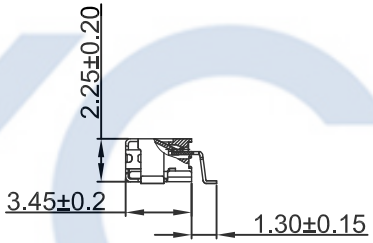

■SPEC.:
- ●Rated Voltage:200V AC,DC
- ●Rated Current:1A AC,DC
- ●Withstand Voltage:500V AC/minute
- ●Contact Resistance:40mΩ max
- ●Insulation Resistance:100MΩ min
- ●Temperature Range:-40℃~+80℃

■Material:
- ●Insulator:LCP UL94V-0
  Color:Natural
- ●Contact:Copper Alloy
  Finish:Gold-plating on contact area
  matte Tin-plating overall Nickel under plated.(Lead Free)
- ●Shell:Stainless Steel
  Finish:Matte Tin-Plating overall Nickel under plated.(Lead Free)
- ●Q'TY：2000PCS/Reel

KB902-30 R S R 3 A

- Pin No.
- T:TUBE 管裝
- R:REEL 卷裝
- P:PE 袋裝
- D:DIP
- S: SMT
- R:Right Angle
- V:Vertical
- Mold No.
- Version

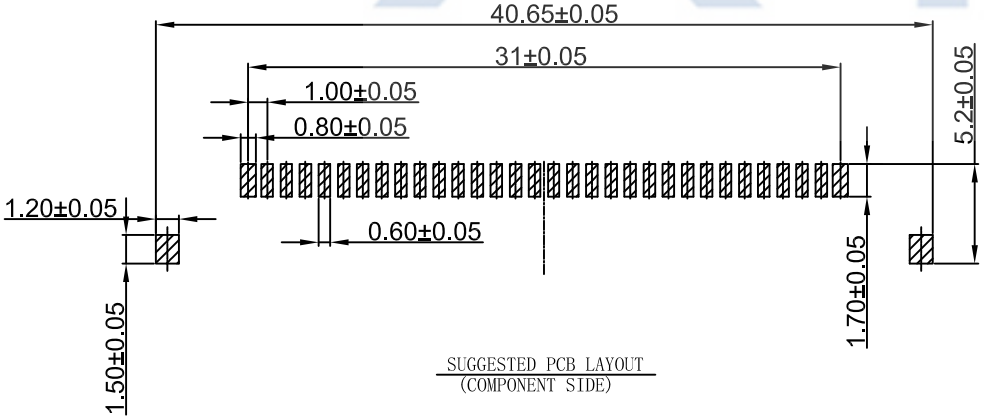

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Precision Connectors

					TOLERANCE 公 差	DRAWING 設計者	Devin	KB902-30RSR3A		XYCO 东莞市轩业电子科技有限公司 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn	
2014-07-24	A		KB902-30RSR3A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位 mm	PRODUCT NAME 產品名稱	FI-X PH1.00mm Wire To Board SMT Right Angle Wafer
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE1909008A		