
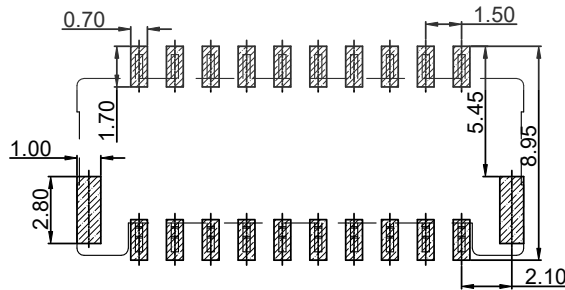

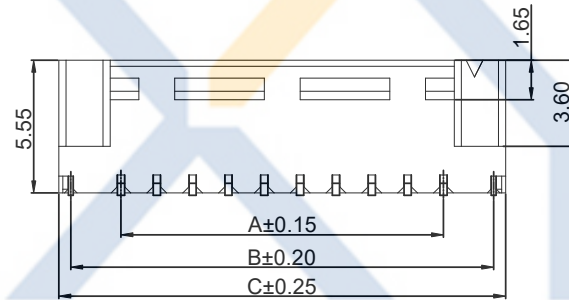

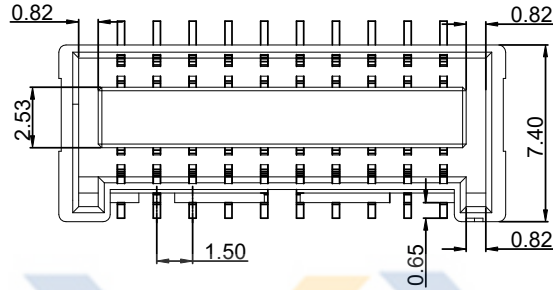


DRAWING FOR CUSTOMER

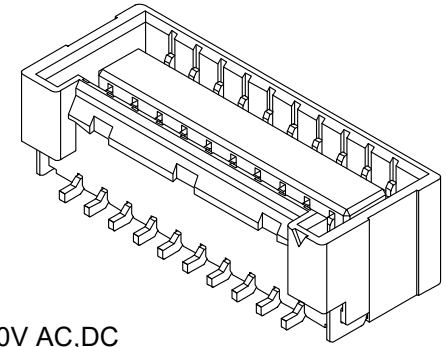

Recommended P.C.B Layout
General Tolerance±0.05

■SPEC.:

- Rated Voltage:100V AC,DC
- Rated Current:2A AC,DC(10~30P)
1.5A AC,DC(32~40P)
- Withstand Voltage:500V AC/minute
- Contact Resistance:30mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-25℃~+85℃

■Material :

- Insulator(A): C1-LCP UL94V-0
Color:BGE-Beige
- Contact PIN(B): Phosphor Bronze
Finish: Tin-Plated, over Nickel
- Solder Tab(C): Brass
Finish: Tin-Plated, over Nickel
- QTY.:1000PCS/Reel

Poles	Dimensions(mm)		
	A	B	C
2X05	6.00	10.20	11.20
2X06	7.50	11.70	12.70
2X07	9.00	13.20	14.20
2X08	10.50	14.70	15.70
2X09	12.00	16.20	17.20
2X10	13.50	17.70	18.70
2X11	15.00	19.20	20.20
2X12	16.50	20.70	21.70
2X13	18.00	22.20	23.20
2X14	19.50	23.70	24.70
2X15	21.00	25.20	26.20
2X16	22.50	26.70	27.70
2X17	24.00	28.20	29.20
2X18	25.50	29.70	30.70
2X19	27.00	31.20	32.20
2X20	28.50	32.70	33.70

XY15004- D XX X S V 2 A -C1-BGE

Double row

Pin No.

包裝方式:

T:TUBE (管裝)

R:REEL (卷裝)

P: PE (袋裝)

S:SMT

D:DIP

Color

Material

Version

Mold No.

R:Right Angle

V:Vertical

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	XY15004-DXXXSV2A-C1-BGE
2021-08-20	A		XY15004-DXXXSV2A-C1-BGE	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號 PE210808A

UNIT 單位	mm	PRODUCT NAME 產品名稱	ZPD PH1.50mm Wire To Board SMT Vertical Double Row Wafer