

DRAWING FOR CUSTOMER

- SPEC.:
- Voltage Rating:50V AC/DC
 - Current Rating:1.0A AC/DC
 - Dielectric Strength :500V AC/minute
 - Contact Resistance:30mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-25°C ~+85°C

- Material:
- Insulator:B1-PA66 UL94V-0;
NB1-PA66 UL94V-0 HF.
 - Color:WH-White



XY10002-XXHL2A-XX-WH

Pin No. Color





Housing Material

Lock Version


 Mold No.

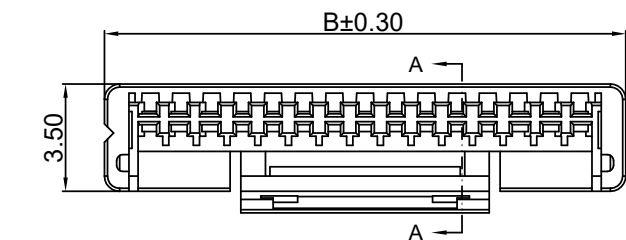


Section:A-A

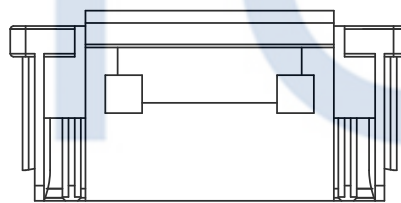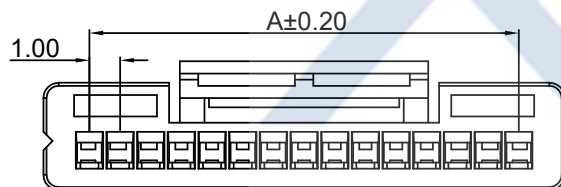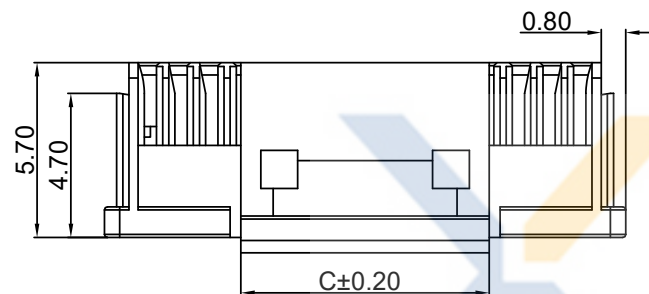


10~15P



2P



3P



4~9P

Poles	Dimensions(mm)		
	A	B	C
02	2.00	5.00	2.00
03	2.00	5.00	2.00
04	3.00	6.00	2.00
05	4.00	7.00	3.40
06	5.00	8.00	4.30
07	6.00	9.00	4.30
08	7.00	10.00	4.30
09	8.00	11.00	4.30
10	9.00	12.00	6.15
11	10.00	13.00	6.15
12	11.00	14.00	6.15
13	12.00	15.00	6.15
14	13.00	16.00	8.10
15	14.00	17.00	8.10

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2022-04-25	A		XY10002-XXHL2A-XX-WH	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	XY10002-XXHL2A-XX-WH
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE220401A

UNIT 單位	mm	PRODUCT NAME 產品名稱	NSH PH1.0mm Wire To Board Housing With Lock
------------	----	----------------------	--