


# DRAWING FOR CUSTOMER

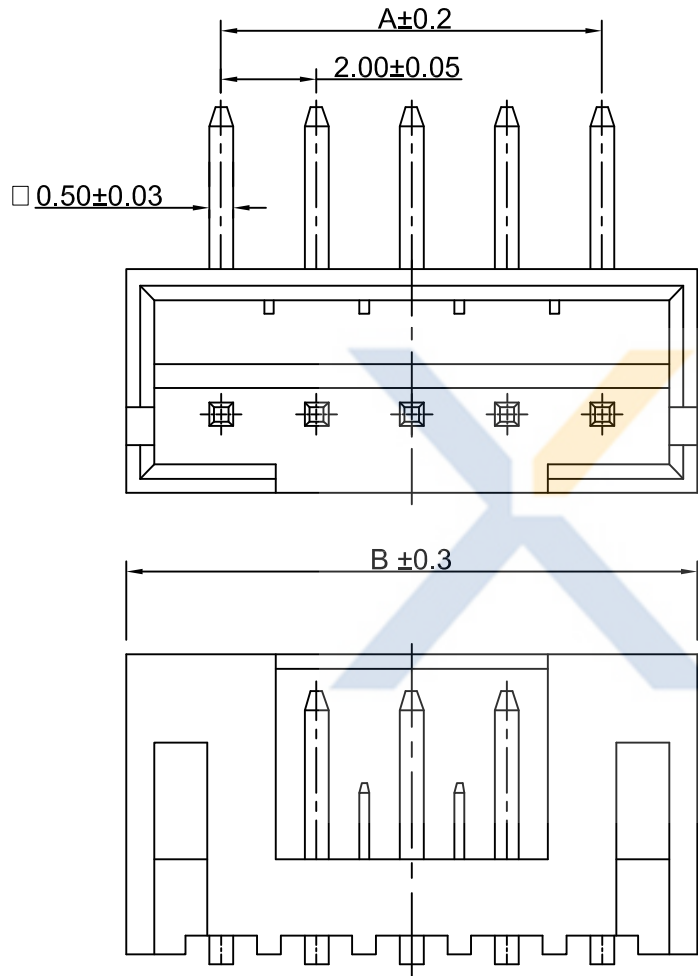

KB933-XX X D R 5 A



Pin No. | X | D | R | 5 | A

Package Method: | | | | |

T: TUBE (管装)  
R: REEL (卷装)  
P: PE (袋装)

Version  
Mold No.  
R: Right Angle  
V: Vertical  
S: SMT  
D: DIP

- SPEC.:
- Rated Voltage:100V AC,DC
  - Rated Current:2A AC,DC
  - Withstand Voltage:800V AC/minute
  - Contact Resistance:10mΩ max
  - Insulation Resistance:1000MΩ min
  - Temperature Range:-25℃~+85℃
- Housing
- Material:Nylon66 UL94-V0
  - Contact:Brass

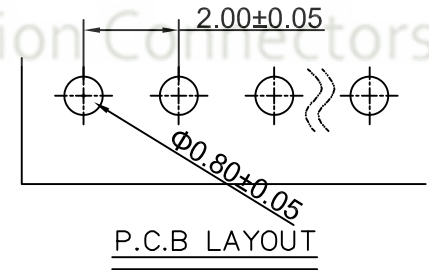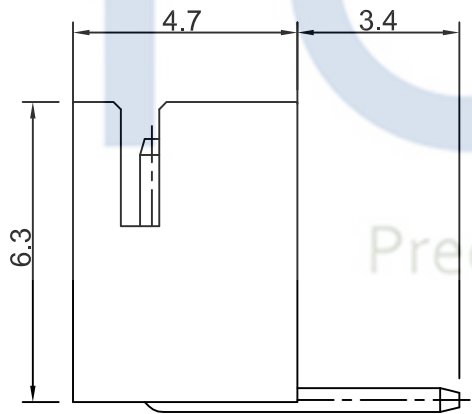

Poles	A	B
2	2.0	6.1
3	4.0	8.1
4	6.0	10.1
5	8.0	12.1
6	10.0	14.1
7	12.0	16.1
8	14.0	18.1
9	16.0	20.1
10	18.0	22.1
11	20.0	24.1
12	22.0	26.1
13	24.0	28.1
14	26.0	30.1
15	28.0	32.1
16	30.0	34.1

**XYCO PRECISION CONNECTORS**

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

				TOLERANCE 公差		DRAWING 設計者		John		KB933-XXXDR5A					
2016-12-16		A		.X=±0.25 .XX=±0.15 .XXX=±0.10		CHECKED 審查		Thomas		PART NO. 料號		UNIT 單位		mm	
DATE 日期		VER 版本		CHANGE HISTORY 變更歷史		APPROVED 核准		William		DWG NO. 圖號		PRODUCT NAME 產品名稱		PHR PH2.0mm Wire To Board Dip Right Angle Wafer	
1		2		3		4		5		6		7		8	