

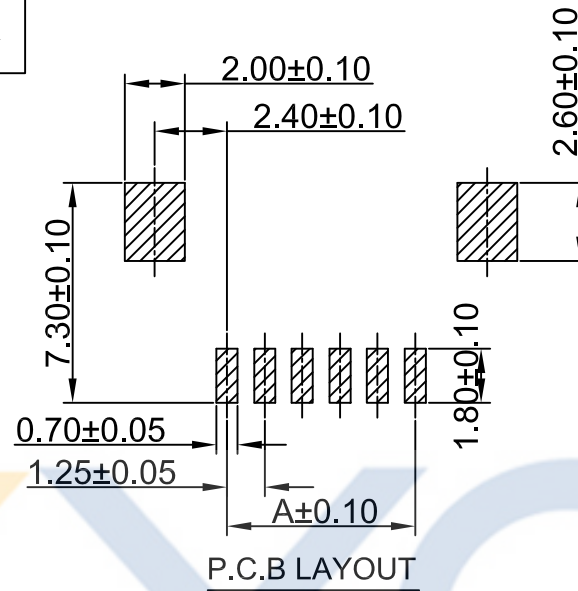
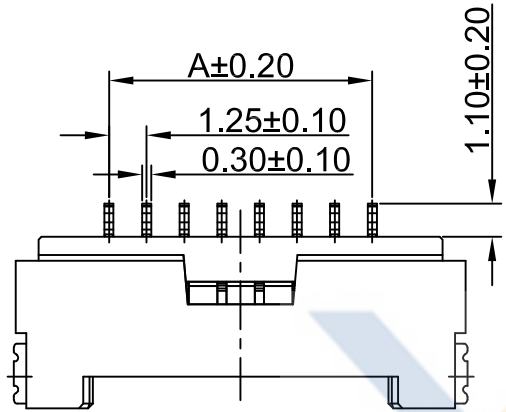


# DRAWING FOR CUSTOMER



- SPEC.:
- Rated Voltage:150V AC,DC
  - Rated Current:1A AC,DC
  - Withstand Voltage:500V AC/minute
  - Contact Resistance:30mΩ max
  - Insulation Resistance:500MΩ min
  - Temperature Range:-25℃~+85℃

- Material:
- Insulator :PA6T UL94V-0  
Color:Natural
  - Contact Pin :Brass  
Finish:Tin-plated,over Nickel
  - Solder Tab:Brass  
Finish:Tin-plated,over Nickel

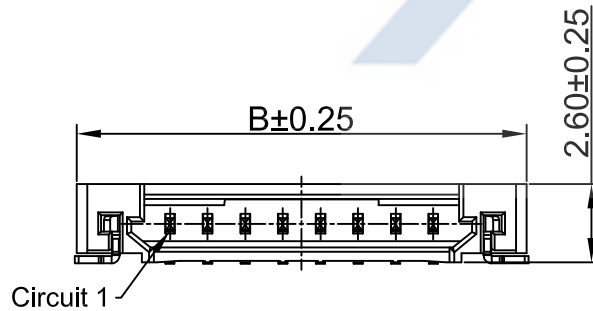

KB912- XX X S R L 5 A

Pin No.    X    S    R    L    5    A

T:TUBE 管裝  
 R:REEL 卷裝  
 P:PE 袋裝  
 S:SMT  
 D:DIP

Version  
 Mold No.  
 L:With Lock  
 R:Right angle  
 V:Vertical

Poles	Dimensions(mm)	
	A	B
02	1.25	7.45
03	2.50	8.70
04	3.75	9.95
05	5.00	11.20
06	6.25	12.45
07	7.50	13.70
08	8.75	14.95
09	10.00	16.20
10	11.25	17.45
11	12.50	18.70
12	13.75	19.95
13	15.00	21.20
14	16.25	22.45
15	17.50	23.70
20	23.75	29.95

**XYCO** 东莞市轩业电子科技有限公司  
 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB912-XXXSRL5A
2015-06-16	A		KB912-XXXSRL5A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE1808005A

UNIT 單位	mm	PRODUCT NAME 產品名稱	DF14 PH1.25mm Wire To Board SMT Right Angle Wafer With Lock
UNIT	mm	PRODUCT NAME	DF14 PH1.25mm Wire To Board SMT Right Angle Wafer With Lock