DRAWING FOR CUSTOMER

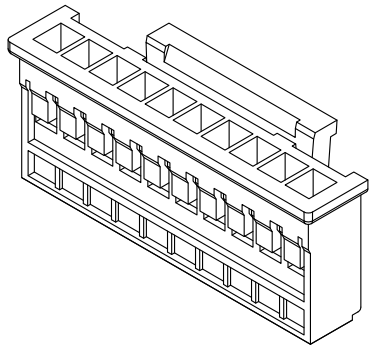

KB9310-X X H L 1 A- XX

- Pin No.
- Housing
- With Lock
- Color
- Version
- Mold No.

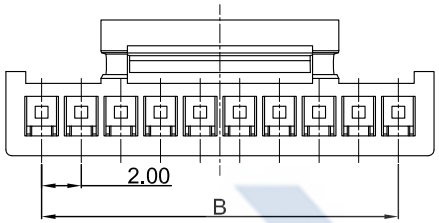

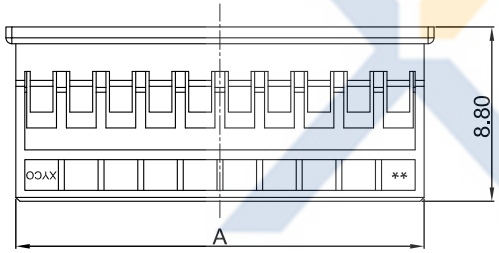



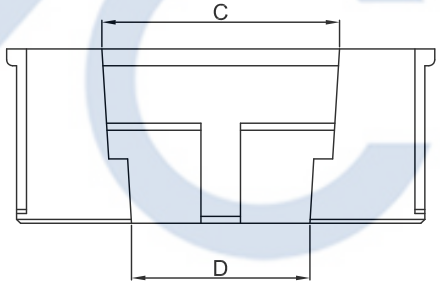

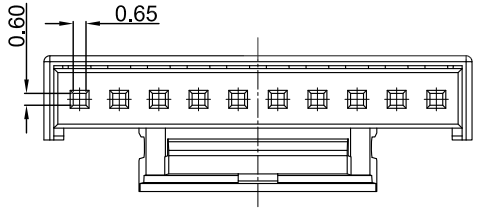

■SPEC.:
- ●Rated Voltage:250V AC,DC
- ●Rated Current:3A AC,DC
- ●Withstand Voltage:1000V AC/minute
- ●Contact Resistance:40mΩ max
- ●Insulation Resistance:100MΩ min
- ●Temperature Range:-25℃~+85℃

■Material:
- ●Insulator:PA66 UL94V-0
  Color:WH-White
  BK-Black

Poles	Dimensions(mm)			
	A	B	C	D
05	10.60	8.00	6.00	3.00
06	12.60	10.00	8.00	5.00
07	14.60	12.00	10.00	7.00
10	20.60	18.00	12.00	9.00
12	24.60	22.00	16.00	13.00
14	28.60	26.00	20.00	17.00

XYCO Precision Connectors

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2016-05-27	A		KB9310-XXHL1A-XX	Devin

TOLERANCE 公 差	DRAWING 設計者	Devin
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas
	APPROVED 核准	William

KB9310-XXHL1A-XX			
PART NO. 料號		UNIT 單位	mm
DWG NO. 圖號	PE2108A		

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

PRODUCT NAME 產品名稱	PH2.0 Wire to board Housing With Lock