DRAWING FOR CUSTOMER

■NOTES:
■Material & Finish;
●Housing:LCP,UL94V-0,Black
●Contact:Phosphor Bronze;Au plated 3~5u" on the contact area,and Au plated 1~3u" on the solder area,over Nickle underplating 50u".
●Shell:Phosphor Bronze;Au plated 1~3u" over Nickel underplating 50u"min.
■Recommended cable:
SGC. :AWG#40,42,44,46
DISCRETE:AWG#36
■It can be used the SGC cable and the TEFLON cable together.

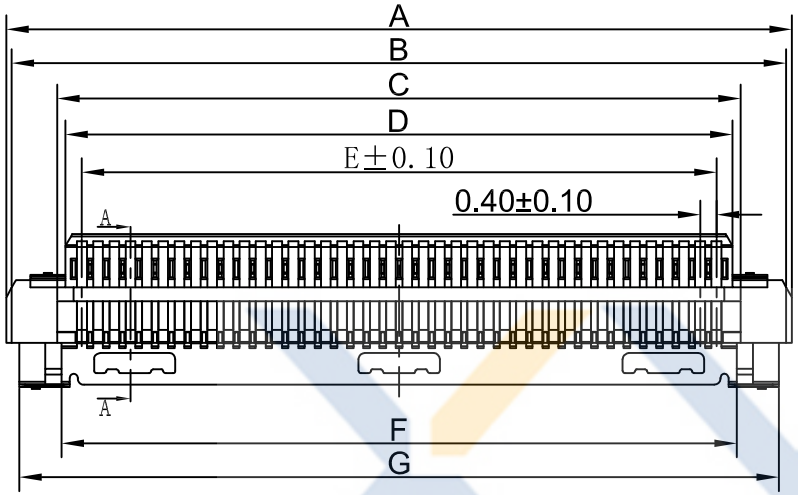

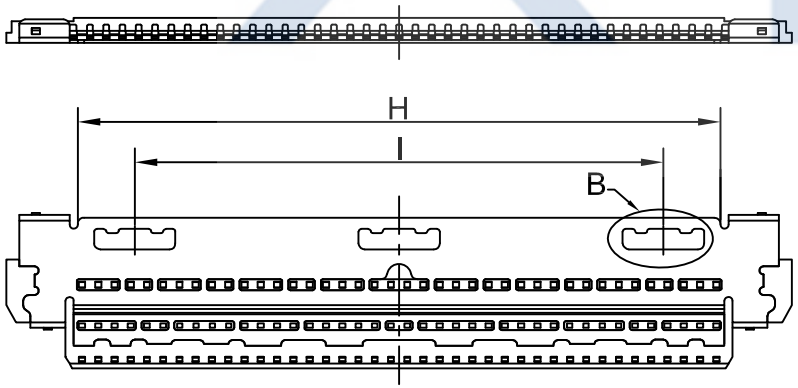



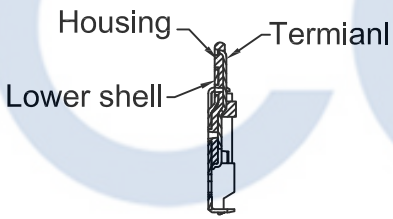

SECTION A-A

KB402 - XX H X A

Pin No.
Housing
Version
Mold No.

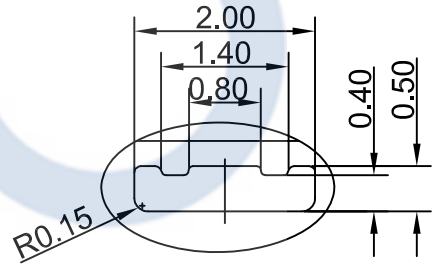

SECTION B-B

Pin	A	B	C	D	E	F	G	H	I
40	19.32	19.04	16.80	16.40	15.60	16.60	18.68	15.80	13.00
30	15.32	15.04	12.80	12.40	11.60	12.60	14.68	11.80	9.00

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2013-04-13	A		KB402-XXHXA	John

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者: John
CHECKED 審查: Thomas
APPROVED 核准: William

KB402-XXHXA
PART NO. 料號
DWG NO. 圖號: PE0604A

UNIT 單位: mm

PRODUCT NAME 產品名稱: I-PEX 0.40mm 20473 LVDS CONNECTOR

DRAWING FOR CUSTOMER

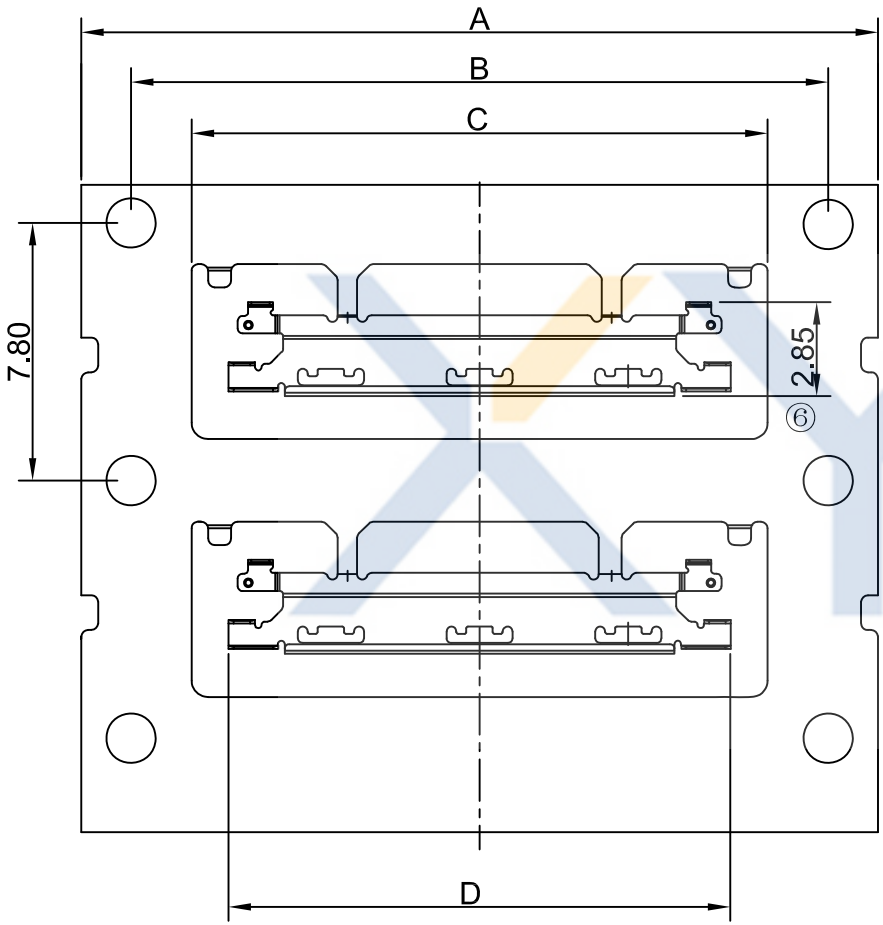

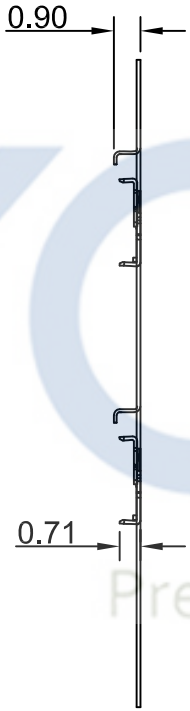

■NOTES:
■Material & Finish;
●Housing:LCP,UL94V-0,Black
●Contact:Phosphor Bronze;Au plated 3~5u" on the contact area,and Au plated 1~3u" on the solder area,over Nickle underplating 50u".
●Shell:Phosphor Bronze;Au plated 1~3u" over Nickel underplating 50u"min.
■Recommended cable:
SGC. :AWG#40,42,44,46
DISCRETE:AWG#36
■It can be used the SGC cable and the TEFLON cable together

KB402 - XX S X A

Pin No.
Shell
Version
Mold No.

Pin	A	B	C	D
40	28.10	25.10	21.44	18.68
30	24.10	21.10	17.44	15.20

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

					TOLERANCE 公 差	DRAWING 設計者	John	KB402-XXSXA				
2013-04-13	A		KB402-XXSXA	John	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號		UNIT 單位	mm	PRODUCT NAME 產品名稱: I-PEX 0.40mm 20473 LVDS Connector Upper shell
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE0602A			