
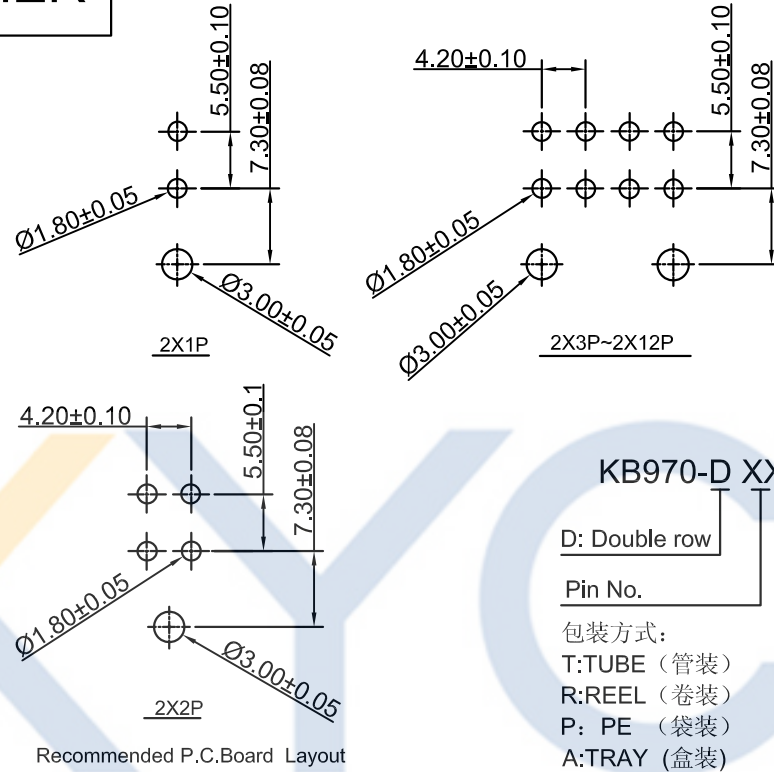


DRAWING FOR CUSTOMER

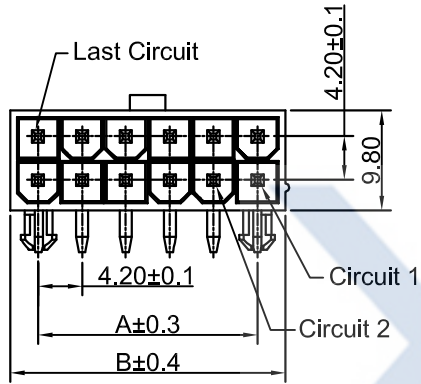

■SPEC.:

- Rated Voltage:600V AC,DC
- Rated Current:9A AC,DC
- Withstand Voltage:1500V AC/minute
- Insulation Resistance:1000MΩ min
- Contant Resistance:20mΩ Max.
- Temperature Range:-25℃~+85℃

■Notes:

- Insulation Material:Nylon66 UL94-V2
- Contact Material: Brass
- Plating : Tin-plated;Over Nikel-plated

KB970-D XX X D R 5 A

D: Double row

Pin No.

包装方式:

- T:TUBE (管装)
- R:REEL (卷装)
- P: PE (袋装)
- A:TRAY (盒装)


Version

Mold No.

R:Right Angle
V:Vertical

S:SMT
D:DIP

Poles	Dimensions	
	A	B
2*1	—	5.60
2*2	4.20	9.90
2*3	8.40	14.10
2*4	12.60	18.30
2*5	16.80	22.50
2*6	21.00	26.70
2*7	25.20	30.90
2*8	29.40	35.20
2*9	33.60	39.50
2*10	37.80	43.70
2*11	42.00	47.90
2*12	46.20	52.20

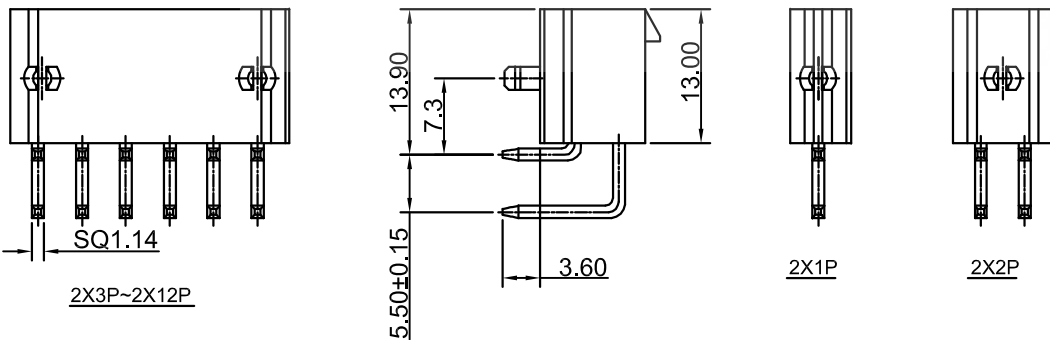

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-07-08		A	KB970-DXXXDR5A		John	TOLERANCE 公差	DRAWING 設計者	John	KB970-DXXXDR5A		UNIT 單位	mm	PRODUCT NAME 產品名稱	MOLEX5569 PH4.2mm Double Row DIP Right Angle Wafer
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號					
							APPROVED 核准	William	DWG NO. 圖號	PE1811012A				