


DRAWING FOR CUSTOMER

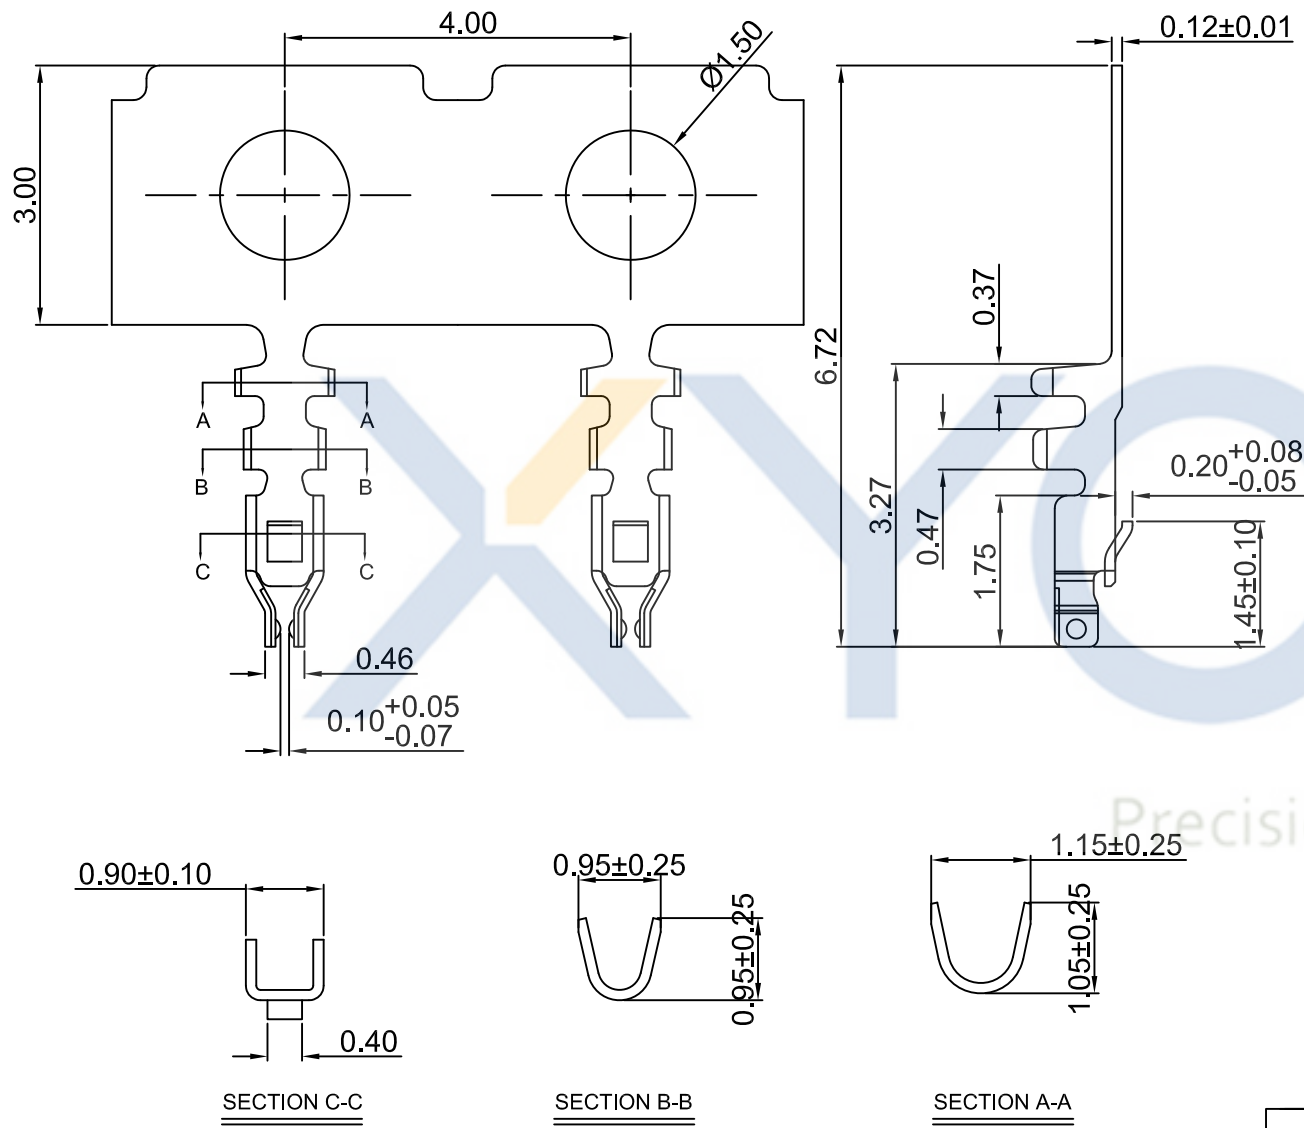

■SPEC.:

- Rated Voltage:50V AC,DC
- Rated Current:1.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

■Terminal:

- Material:Phosphor Bronze
- Finish:Gold-flash over Nickel
- Applicable Wires:AWG#30~36
- QTY.:15KPCS/Reel

KB1201-X X T 1 A

1:All plated	Version
2:Half plated	
Plating	Terminal
0:Tin-plat	
1:Gold Plat1u"	
2:Gold Plat3u"	
3:Gold Plat5u"	
10:Gold Plat10u"	
15:Gold Plat15u"	

DATE 日期	VER 版本	CHANGE HISTORY 变更历史	CHANGED NAME 修改后料号	DRAWING 变更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 设计者 Devin	KB1201-XXT1A
2021-08-13	A		KB1201-XXT1A	Devin		Thomas	PART NO. 料號
						William	DWG NO. 圖號 PE16011002A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

UNIT 单位	mm	PRODUCT NAME 产品名称	78172 PH1.20mm Wire To Board Terminal
------------	----	----------------------	--