


DRAWING FOR CUSTOMER

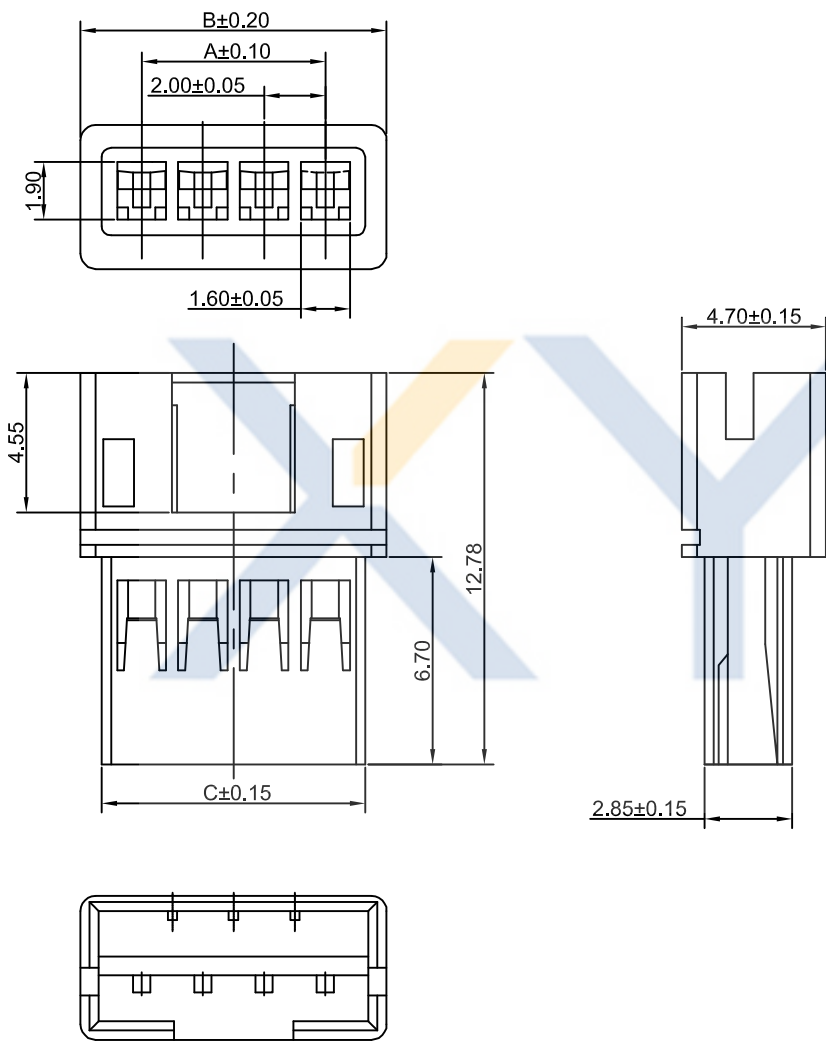


■SPEC.:

- Rated Voltage:100V AC,DC
- Rated Current:2A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator:PA66 UL94V-0
- Color:Black

KB933-XXH6A-F1

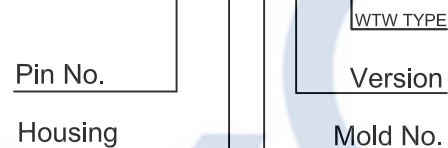

Poles	Dimension(mm)		
	A	B	C
02	2.00	6.00	4.60
03	4.00	8.00	6.60
04	6.00	10.00	8.60
05	8.00	12.00	10.60
06	10.00	14.00	12.60
07	12.00	16.00	14.60
08	14.00	18.00	16.60
09	16.00	20.00	18.60
10	18.00	22.00	20.60
11	20.00	24.00	22.60
12	22.00	26.00	24.60

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB933-XXH6A-F1
2016-08-17	A		KB933-XXH6A-F1	Devin	.X=±0.15 .XX=±0.10 .XXX=±0.05	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號

UNIT 位	mm	PRODUCT NAME 產品名稱	PHR PH2.00mm Wire To Wire Housing-Female