


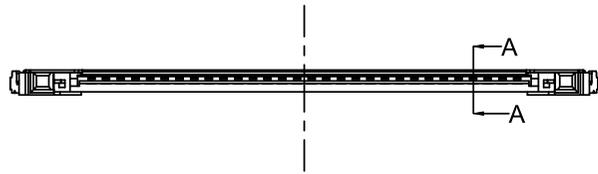
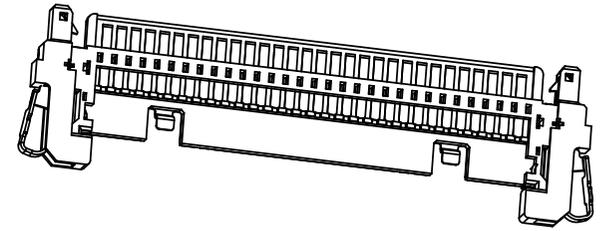
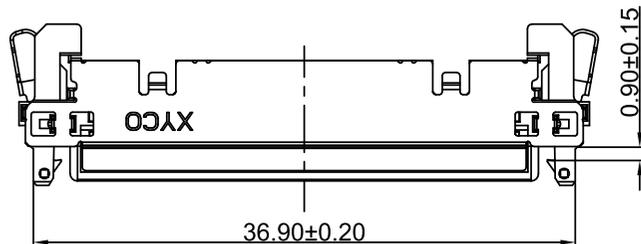



DRAWING FOR CUSTOMER



Section:A-A

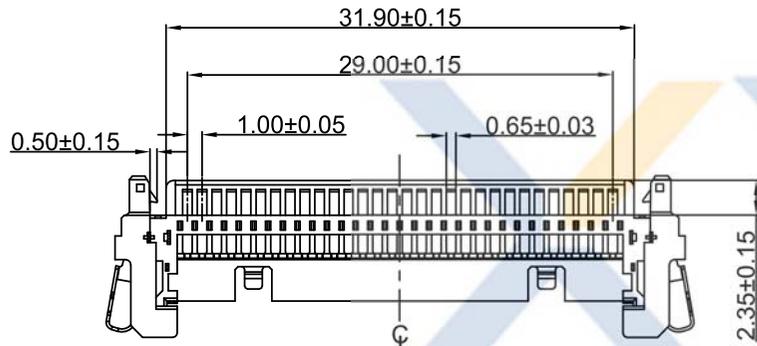


■SPEC.:

- Rated Voltage:200V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40°C~+85°C

■Material:

- Insulator: LCP UL94V-0 ,
Color:Black
- Contact Pin:Phoshor Bronze
Finish: Gold Plated 3u" (Min) on contact area;Gold Flash Plated on other area; Over Nicke Plated30u"(Min) .
- Lower Shell:Stainless steel
Finish: Solderable Nickel 40u" (Min)
- Lock Spring:Stainless steel

KB902-30 H L S 1 A -C2 X

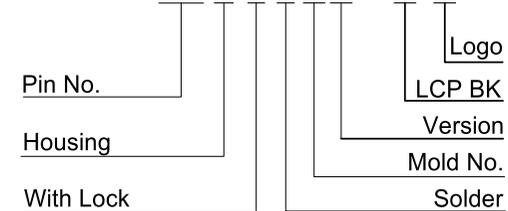

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2024-03-21	A		KB902-30HLS1A-C2X	Devin

TOLERANCE 公差	DRAWING 設計者	CHECKED 審	APPROVED 核准	PART NO. 料號	DWG NO. 圖號
.X=±0.30 .XX=±0.20 .XXX=±0.10	Devin	Thomas	William	KB902-30HLS1A-C2X	PE240305A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

UNIT 單位	mm	PRODUCT NAME 產品名稱
		FI-X30CL PH:1.00mm 30P Wire To Board Solder Type Connector