



DRAWING FOR CUSTOMER

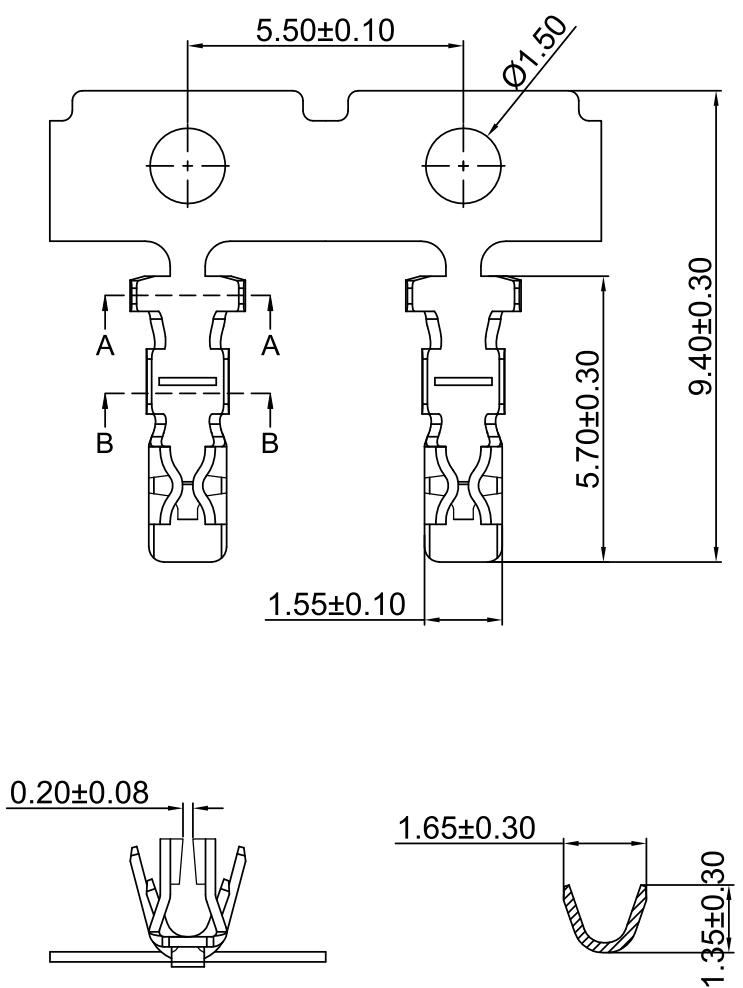

Section:B-B

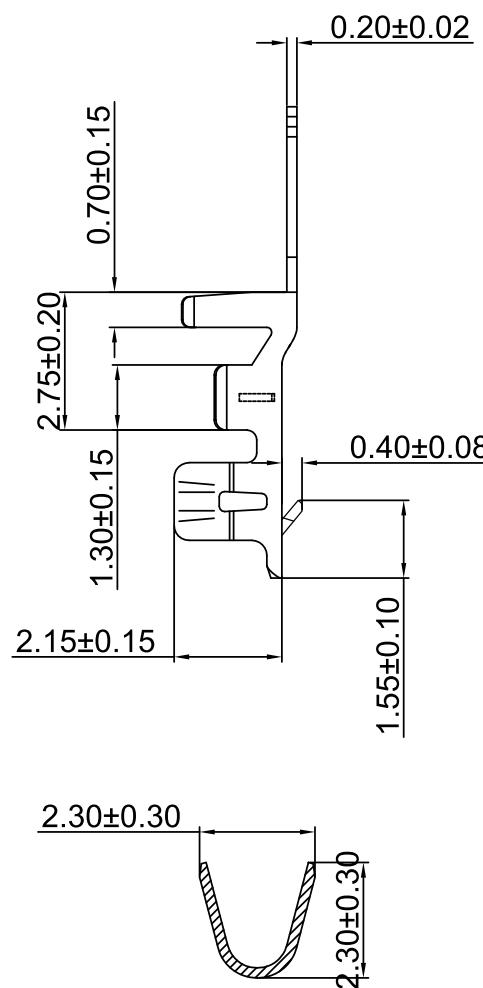

Section:A-A

- SPEC.:
 - Rated Voltage: 250V AC,DC
 - Rated Current: 3A AC,DC
 - Withstand Voltage: 650V AC/minute
 - Contact Resistance: 30mΩ max
 - Insulation Resistance: 1000MΩ min
 - Temperature Range: -25°C ~ +85°C

- Terminal:
 - Material: Phosphor Bronze
 - Finish: Tin-plated, over Nickel
 - Applicable wire: AWG#22~28
 - Insulation O.D: 1.45mm Max
 - QTY.: 10KPCS/Reel

KB930-X X T 1 A

1:All plated
2:Half plated

Plating

0: Tin-plat
1: Gold Flash
2: Gold Plat3u"
3: Gold Plat5u"

Version

Mold No.

Terminal

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DF3 PH2.00mm Wire To Board
Terminal

					TOLERANCE 公差	DRAWING 设计者	Design 设计者	KB930-XXT1A			
2024-03-15	A		KB930-XXT1A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas 工程章	PART NO. 料號	UNIT 單位	mm	PRODUCT NAME 產品名稱
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE240308A		DF3 PH2.00mm Wire To Board Terminal

