

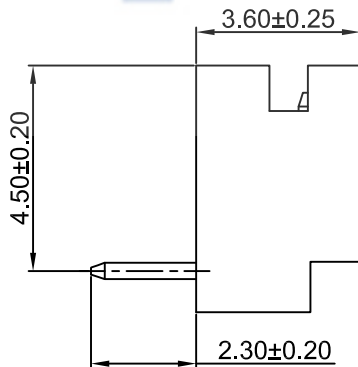
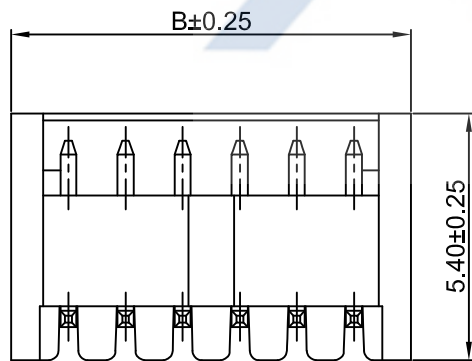


# DRAWING FOR CUSTOMER

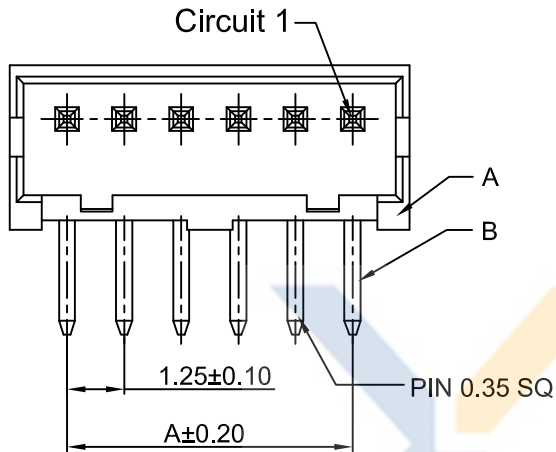

P.C.B LAYOUT

- SPEC.:
- Rated Voltage:150V AC,DC
  - Rated Current:1A AC,DC
  - Withstand Voltage:500V AC/minute
  - Contact Resistance:30mΩ max
  - Insulation Resistance:500MΩ min
  - Temperature Range:-25℃~+85℃

- Material:
- Insulator(A):PA66 UL94V-0  
Color: Brown
  - Contact Pin(B):Brass/Tin-plated  
Finish: Tin-plated, over Nickel

KB911- XX X D R 5 A

Pin No.

T: TUBE 管裝  
R: REEL 卷裝  
P: PE 袋裝

Version  
Mold No.  
R: Right angle  
V: Vertical

S: SMT  
D: DIP

Poles	Dimensions(mm)	
	A	B
02	1.25	3.75
03	2.50	5.00
04	3.75	6.25
05	5.00	7.50
06	6.25	8.75
07	7.50	10.00
08	8.75	11.25
09	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB911-XXXDR5A
2015-06-21	A		KB911-XXXDR5A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號 PE1707002A

UNIT 單位	mm	PRODUCT NAME 產品名稱	DF13 PH1.25mm Wire To Board Dip Right angle Wafer