DRAWING FOR CUSTOMER

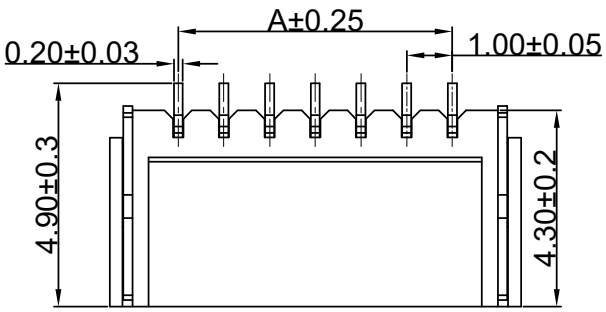

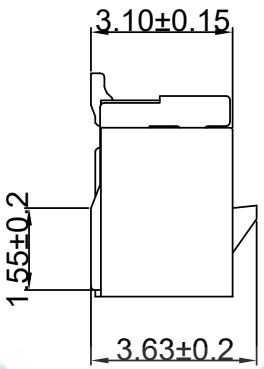

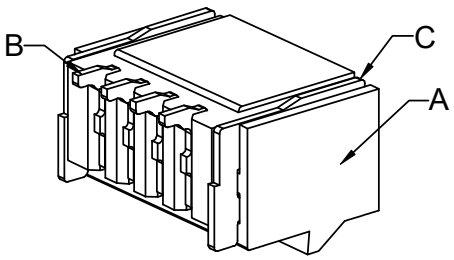

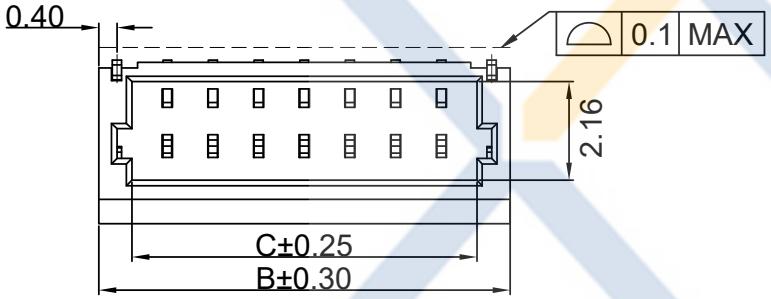

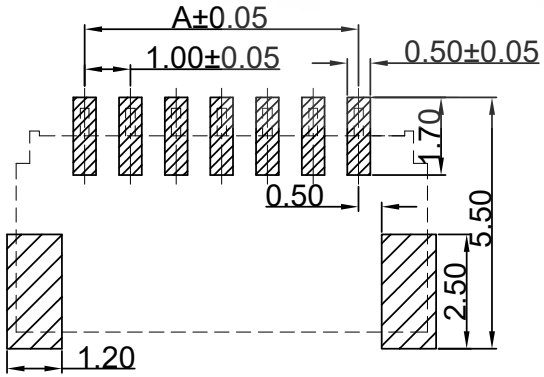

Recommend PCB Layout

■SPEC.:
- ●Rated Voltage: 50V AC,DC
- ●Rated Current: 1.0A
- ●Withstand Voltage: 500V AC/minute
- ●Contact Resistance: 20mΩ max
- ●Insulation Resistance: 100MΩ min
- ●Temperature Range: -25°C~+105°C

■Material:
- ●Insulator(A): C1-LCP UL94V-0
  Color:BGE-Beige
- ●Contact PIN(B): Phosphor Bronze
  Finish:Matted Sn-Plated,over Nickel
- ●Solder Tab(C):Phosphor Bronze
  Finish:Matted Sn-Plated,over Nickel

KB901-XX X S L R X 6 A-C1- BGE

- Pin No.
- 包装方式：
  - T:TUBE（管装）
  - R:REEL（卷装）
  - P：PE （袋装）
- S:SMT / D:DIP
- Lock
- R:Right Angle / V:Vertical
- G:Gold flash / S:Matte Sn
- Mold No.
- Version
- Material
- Color

Poles	Dimensions (mm)		
	A	B	C
02	1.00	4.00	2.45
03	2.00	5.00	3.45
04	3.00	6.00	4.45
05	4.00	7.00	5.45
06	5.00	8.00	6.45
07	6.00	9.00	7.45
08	7.00	10.00	8.45
09	8.00	11.00	9.45
10	9.00	12.00	10.45
11	10.00	13.00	11.45
12	11.00	14.00	12.45
13	12.00	15.00	13.45
14	13.00	16.00	14.45
15	14.00	17.00	15.45
16	15.00	18.00	16.45
20	19.00	22.00	20.45

XYCO Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2013-03-07	A		KB901-XXXSLRX6A-C1-BGE	Devin

TOLERANCE 公 差	.X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者	Devin
CHECKED 審查	Thomas	APPROVED 核准	William

KB901-XXXSLRX6A-C1-BGE			
PART NO. 料號		UNIT 單位	mm
DWG NO. 圖號	PE2005003A		

PRODUCT NAME 產品名稱	SHR1.0mm Wire To Board SMT Right Angle Wafer With Lock