



DRAWING FOR CUSTOMER




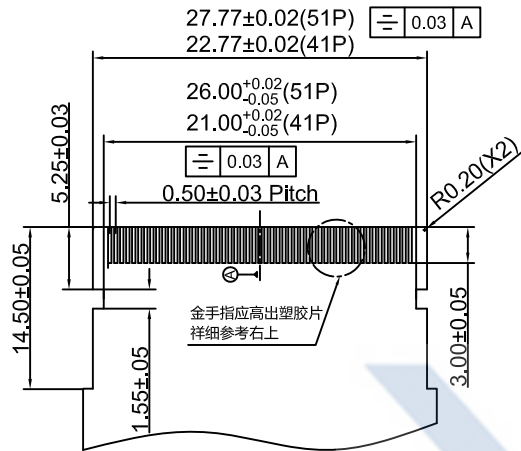


Drawing of FFC Cable Tailer


金手指应高出塑胶片
详细参考右上K图



SCALE 2:1

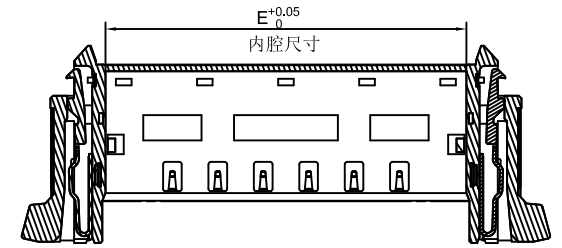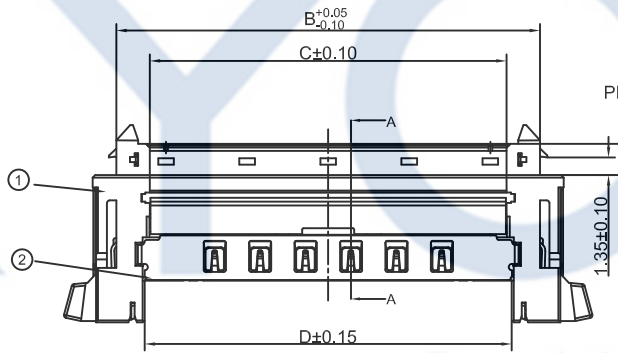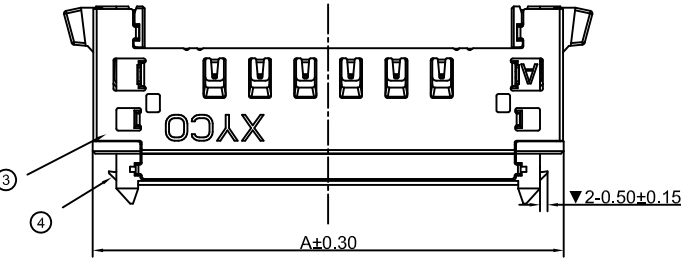

SECTION B-B

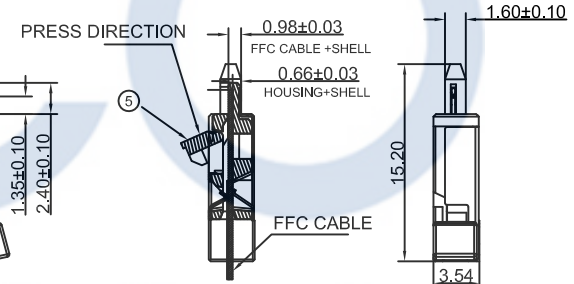

SECTION A-A

KB904-XX H L F 2 C - C1 X
 Pin No. XYCO
 LCP
 Version
 Housing Mold No.
 With Lock FFC Type

金手指
塑胶片
DETAIL *K*

5	Shaft	1	LCP UL94V-0	Black	Shaping
4	Hook	2	SUS T=0.25±0.01mm		Stamping
3	Lower shell	1	SUS T=0.20±0.02mm		Stamping
2	Upper shell	1	SUS T=0.15±0.02mm		Stamping
1	Housing	1	LCP UL94V-0	Black	Shaping
NO.	NAME	QUANTITY	MATERIAL	COLOR	REMARK

PART NO.	A	B	C	D	E
51PIN	36.30	32.65	27.50	28.30	27.80
41PIN	31.30	27.65	22.50	23.30	22.80

2021-05-20	A		KB904-XXHLF2C-C1X	Devin
DATE 日期	VER 版本	CHANGE HISTORY 变更历史	CHANGED NAME 修改后料号	DRAWING 变更者

TOLERANCE 公差	DRAWING 设计者	Devin	KB904-XXHLF2C-C1X
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 审查	Thomas	
	APPROVED 核准	William	

PART NO. 料號	UNIT 单位	mm
DWG NO. 圖號	PE2107016A	

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

PRODUCT NAME 产品名称	LVDS, Plug, PH0.5mm, Housing With Lock
FFC TYPE	

- SPEC.:
- Rated Voltage:200V AC,DC
 - Rated Current:0.7A AC,DC
 - Withstand Voltage:500V AC/minute
 - Contact Resistance:40mΩ max
 - Insulation Resistance:100MΩ min
 - Temperature Range:-40℃~+80℃
 - Applicable wire:FFC WIRE
 - QTY.:100PCS/Plate

Precision Connectors