

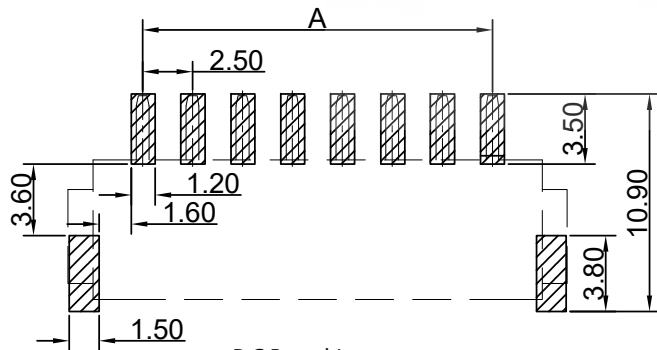

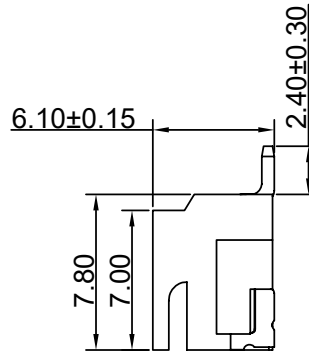



DRAWING FOR CUSTOMER

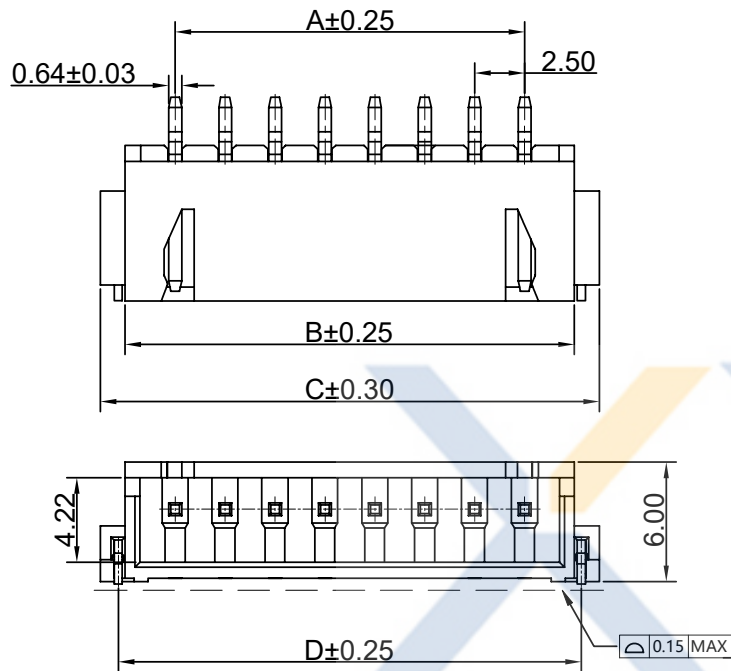

P.C.Board Layout
General Tolerance: ±0.05

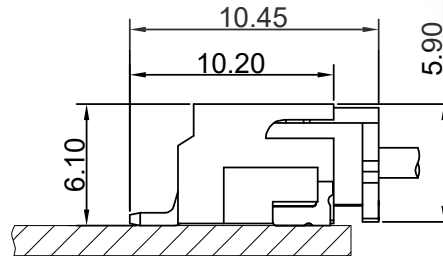

Assembly Layout

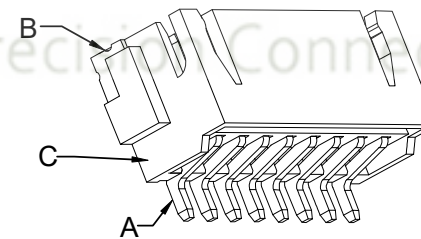

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:3A AC,DC
 - Withstand Voltage:1000V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator(A):C1-LCP UL94V-0
Color:BGE-Beige
 - Contact Pin(B): Brass
Finish:Tin plated;over Nickel
 - Solder Tab(C):Brass
Finish:Tin plated;over Nickel

KB952-XX X S R 6 A-C1- BGE

Pin No. _____ Color _____
 包装方式: _____ Material _____
 T:TUBE (管装) _____ Version _____
 R:REEL (卷装) _____ Mold No. _____
 P: PE (袋装) _____ R:Right Angle _____
 S:SMT _____ V:Vertical _____
 D:DIP _____

Poles	Dimensions(mm)			
	A	B	C	D
02	2.50	7.50	10.00	8.20
03	5.00	10.00	12.50	10.70
04	7.50	12.50	15.00	13.20
05	10.00	15.00	17.50	15.70
06	12.50	17.50	20.00	18.20
07	15.00	20.00	22.50	20.70
08	17.50	22.50	25.00	23.20
09	20.00	25.00	27.50	25.70
10	22.50	27.50	30.00	28.20
11	25.00	30.00	32.50	30.70
12	27.50	32.50	35.00	32.20
13	30.00	35.00	37.50	35.70
14	32.50	37.50	40.00	38.20
15	35.00	40.00	42.50	40.70
16	37.50	42.50	45.00	43.20

XYCO 东莞市轩业电子科技有限公司
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-11-18	A		KB952-XXXSR6A-C1-BGE	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB952-XXXSR6A-C1-BGE
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE211202A

UNIT 單位	mm	PRODUCT NAME 產品名稱	XH PH2.50mm Wire To Board SMT Right Angle Wafer
------------	----	----------------------	--